

San Mateo County CERT Communicators

Batteries 101

Agenda

- **Primary (single-use) Batteries**
 - Alkaline
 - Lithium
- **Secondary (rechargeable) Batteries**
 - Ni-Cad, NiMH
 - Lithium Ion
- **Real World Testing**
- **12v Batteries**
 - Lead Acid
 - Lithium Iron Phosphate (LiFePO₄)

Alkaline

- **Pros**
 - Very low self-discharge (10 year shelf life)
 - Ubiquitous
 - Adapters available for most HTs
- **Cons**
 - Poor high current handling
 - Single use (non-rechargeable)
 - Possibility of leakage
 - Moderate energy density



Alkaline

- Alkaline batteries are 1.5v
- AAA
 - 500 - 1,100 mAh*
- AA
 - 1,500 - 3,000 mAh*
- C
 - 4,800 - 8,000 mAh*
- D
 - 9,000 - 17,000 mAh*
- 9v
 - 350 - 600 mAh*




*500 to 25 mA discharge current

Alkaline (Energizer)

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

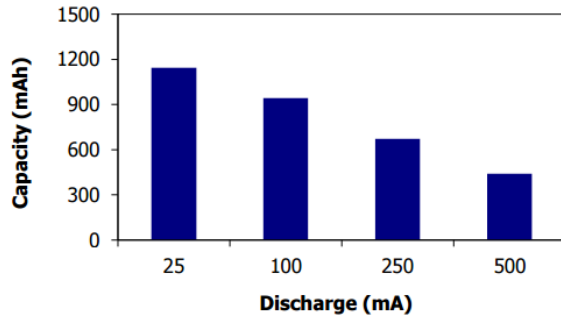

AAA

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

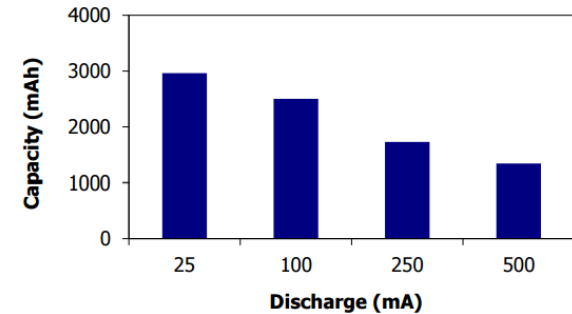

AA

Milliamp-Hours Capacity


Continuous discharge to 0.8 volts at 21°C

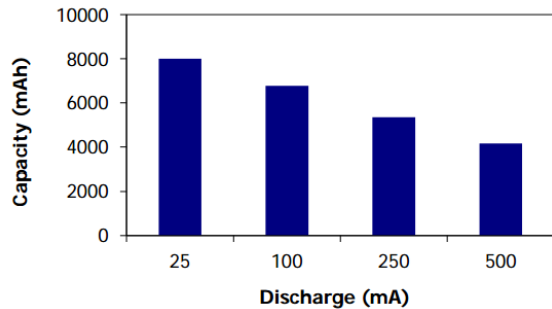

C

Milliamp-Hours Capacity

Continuous discharge to 0.8 volts at 21°C

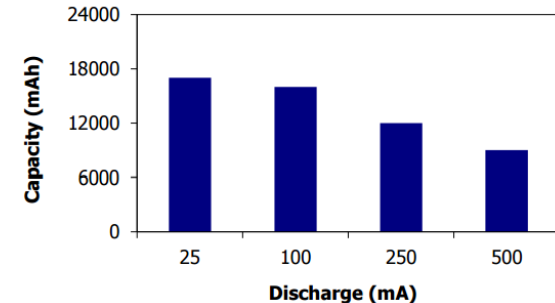


D

Milliamp-Hours Capacity

Continuous discharge to 4.8 volts at 21°C

9v

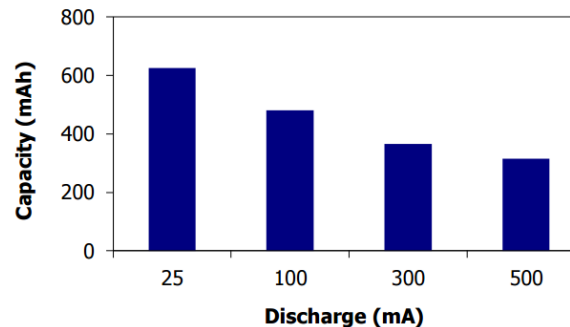


Source: <http://data.energizer.com/>

Alkaline (Peukert's Law)

- Peukert's Law – In lead acid batteries, as the discharge amps increase, the batteries available capacity decreases
- Presented by Wilhelm Peukert in 1897
- Has applications in alkaline batteries

Alkaline (Duracell Quantum)

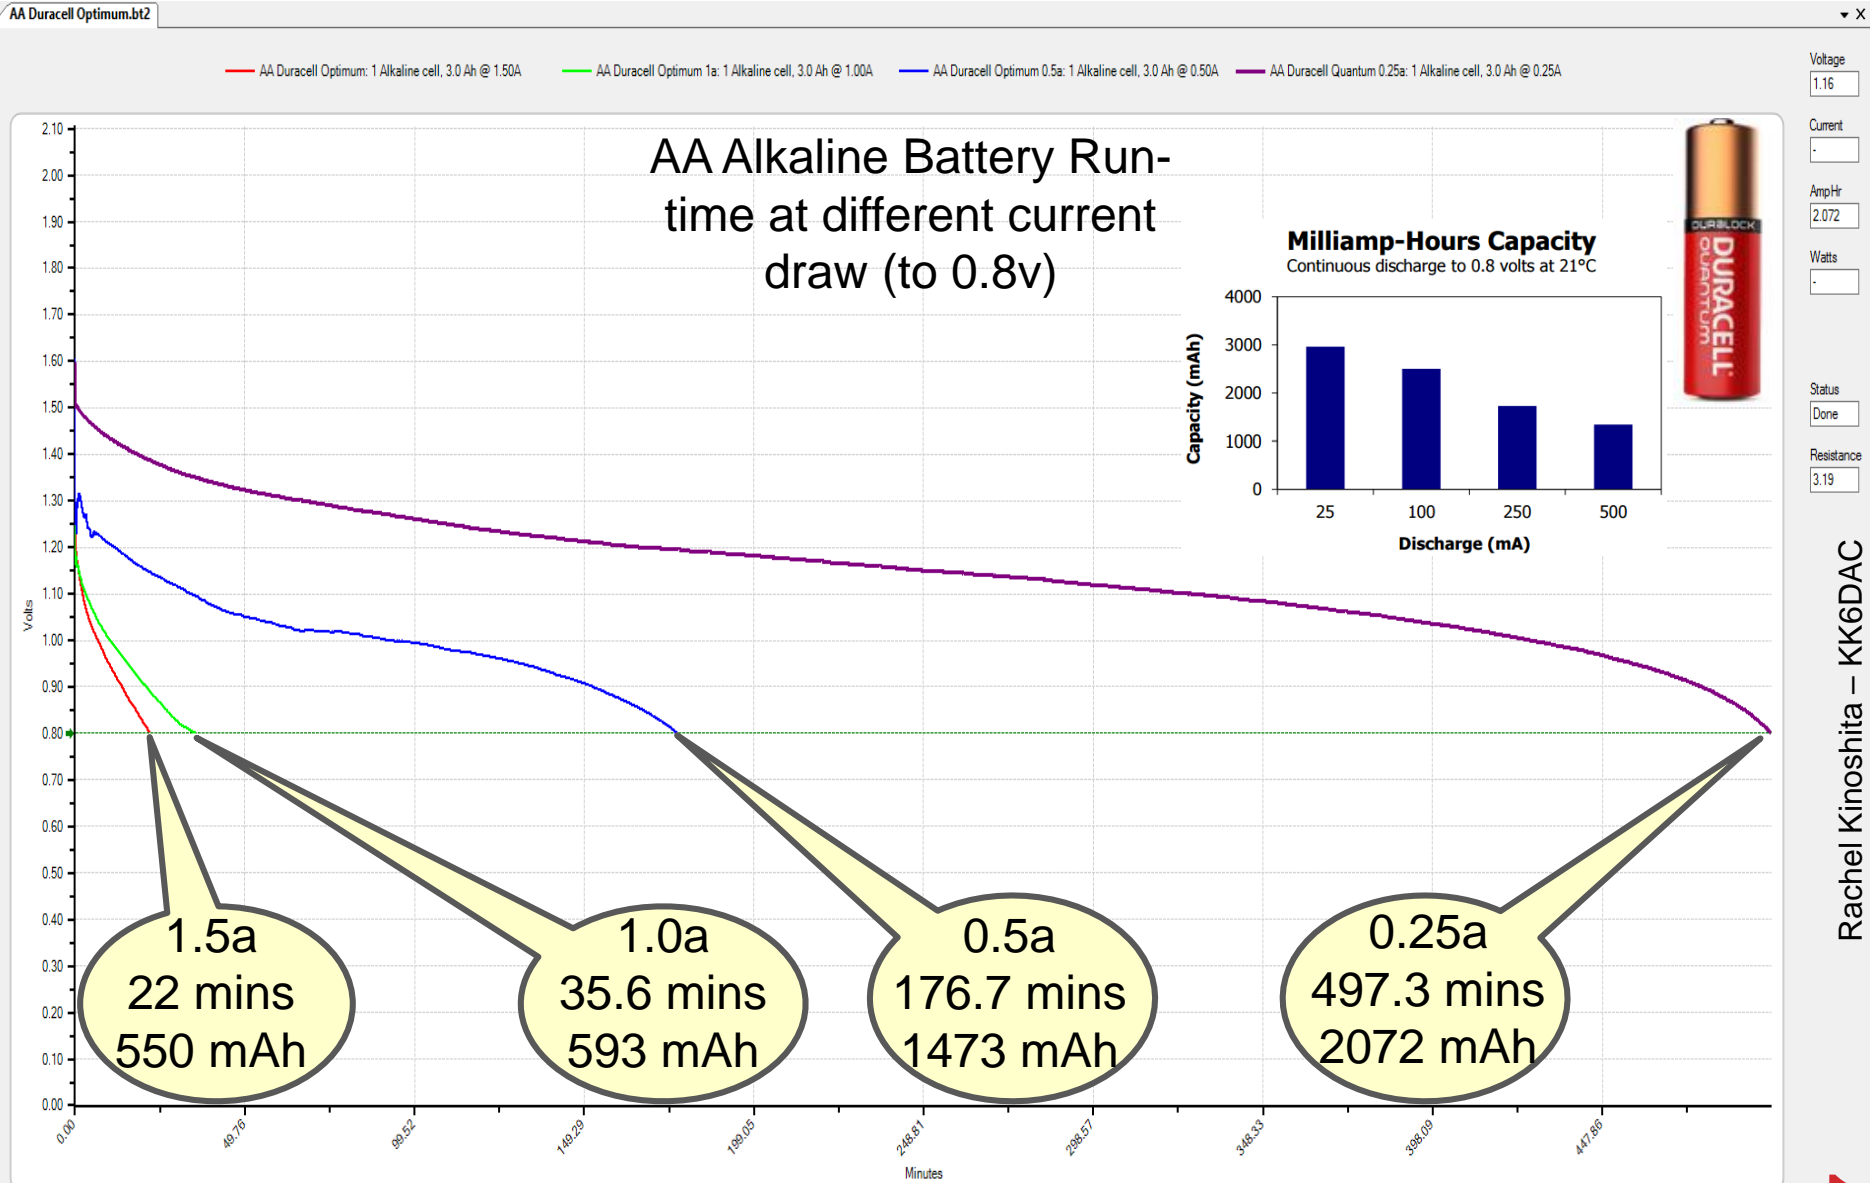


Alkaline (Duracell Quantum)

AA Duracell Optimum.bt2

AA Duracell Optimum: 1 Alkaline cell, 3.0 Ah @ 1.50A AA Duracell Optimum 1a: 1 Alkaline cell, 3.0 Ah @ 1.00A AA Duracell Optimum 0.5a: 1 Alkaline cell, 3.0 Ah @ 0.50A AA Duracell Quantum 0.25a: 1 Alkaline cell, 3.0 Ah @ 0.25A

AA Alkaline Battery Run-time at different current draw (to 1v)

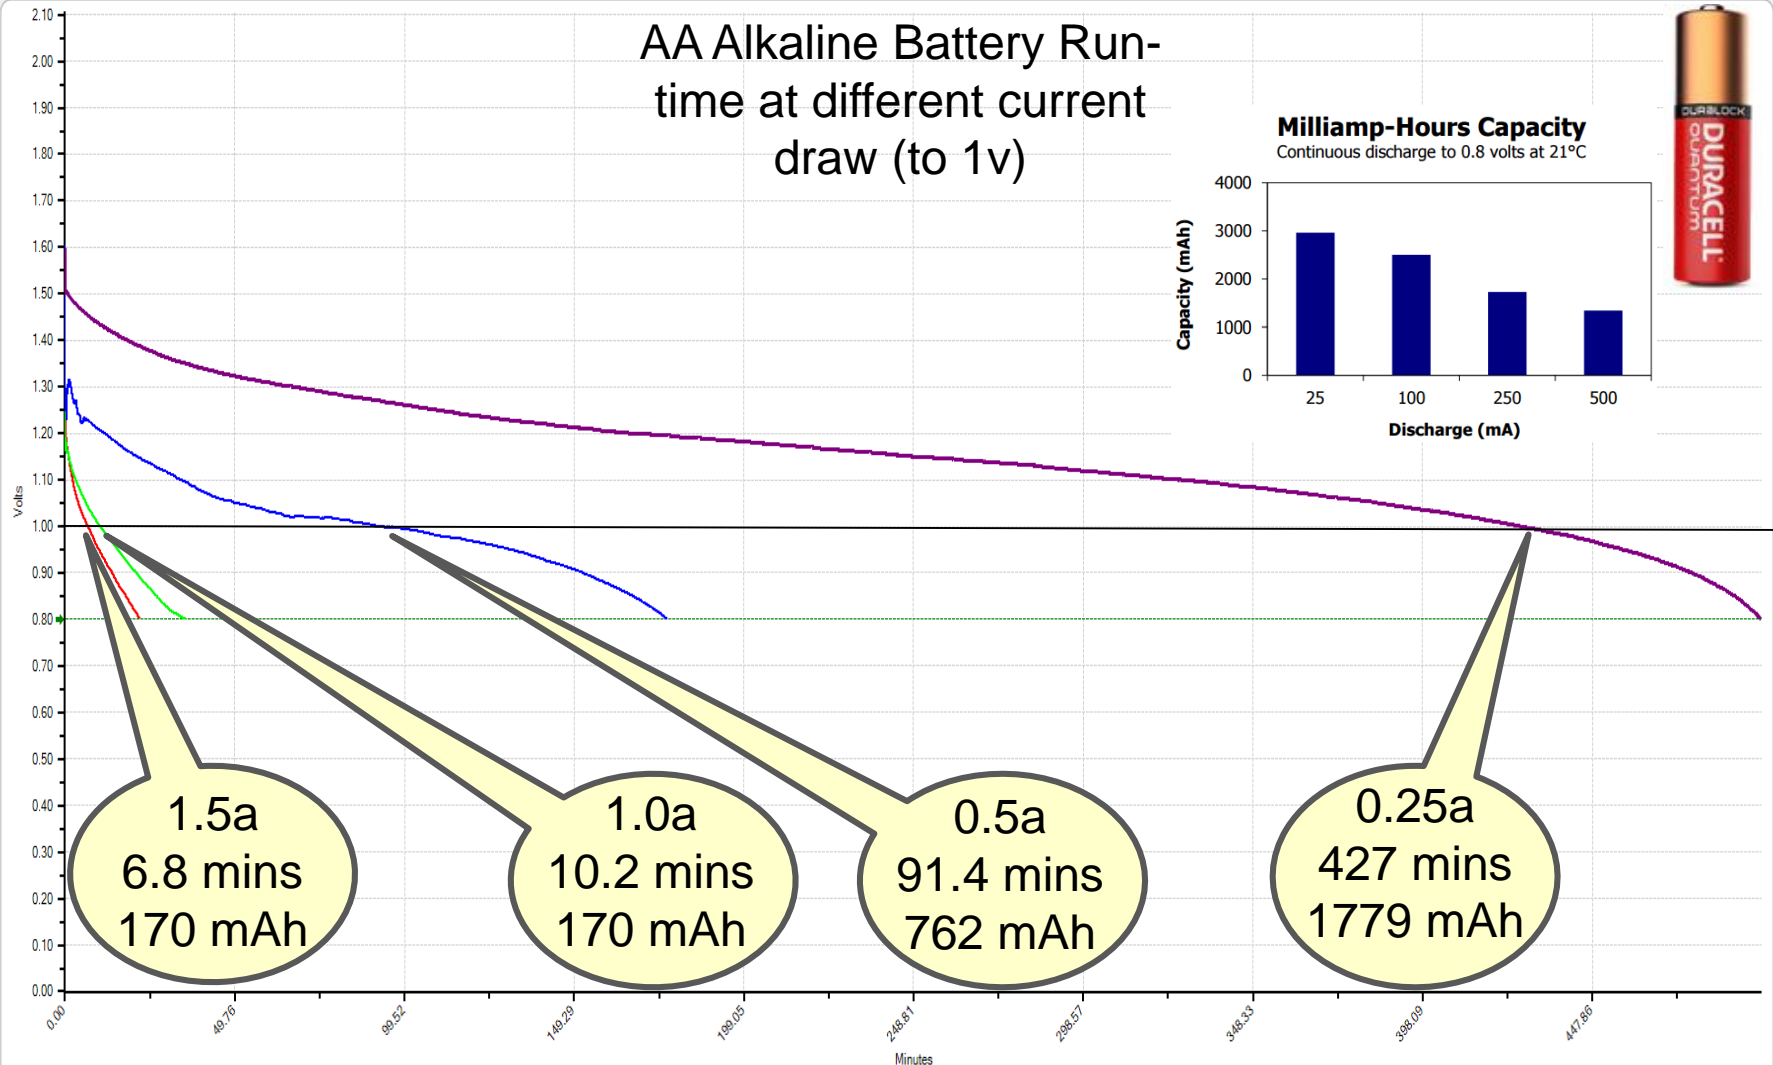

Voltage
1.16

Current
.

AmpHr
2.072

Watts
.

Status
Done

Resistance
3.19

Rachel Kinoshita – KK6DAC

Nickel Metal Hydride (NiMH)

- **Pros (Panasonic Eneloops and Tenenergy Centuras)**
 - Good for high current applications
 - Rechargeable
 - Relatively long shelf life (retains 80% capacity after 1 year)
 - Will not leak
 - Adapters available for most HTs
- **Cons**
 - Moderate energy density
 - Only 1.2v vs 1.5v of alkalines




Nickel Metal Hydride (NiMH)

- **Nickel Metal Hydride batteries are 1.2v**
- **AAA – Panasonic Eneloop Low Self-Discharge**
 - 800 mAh*
- **AA – Panasonic Eneloop Low Self-Discharge**
 - 2,000 mAh*
- **C – Tenergy Centura Low Self-Discharge**
 - 4,000 mAh*
- **D – Tenergy Centura Low Self-Discharge**
 - 8,000 mAh*
- **9v – Tenergy Centura Low Self-Discharge**
 - 200 mAh*

***500 mA discharge current**

Nickel Metal Hydride (NiMH)

500 mA (0.5A) continuous discharge

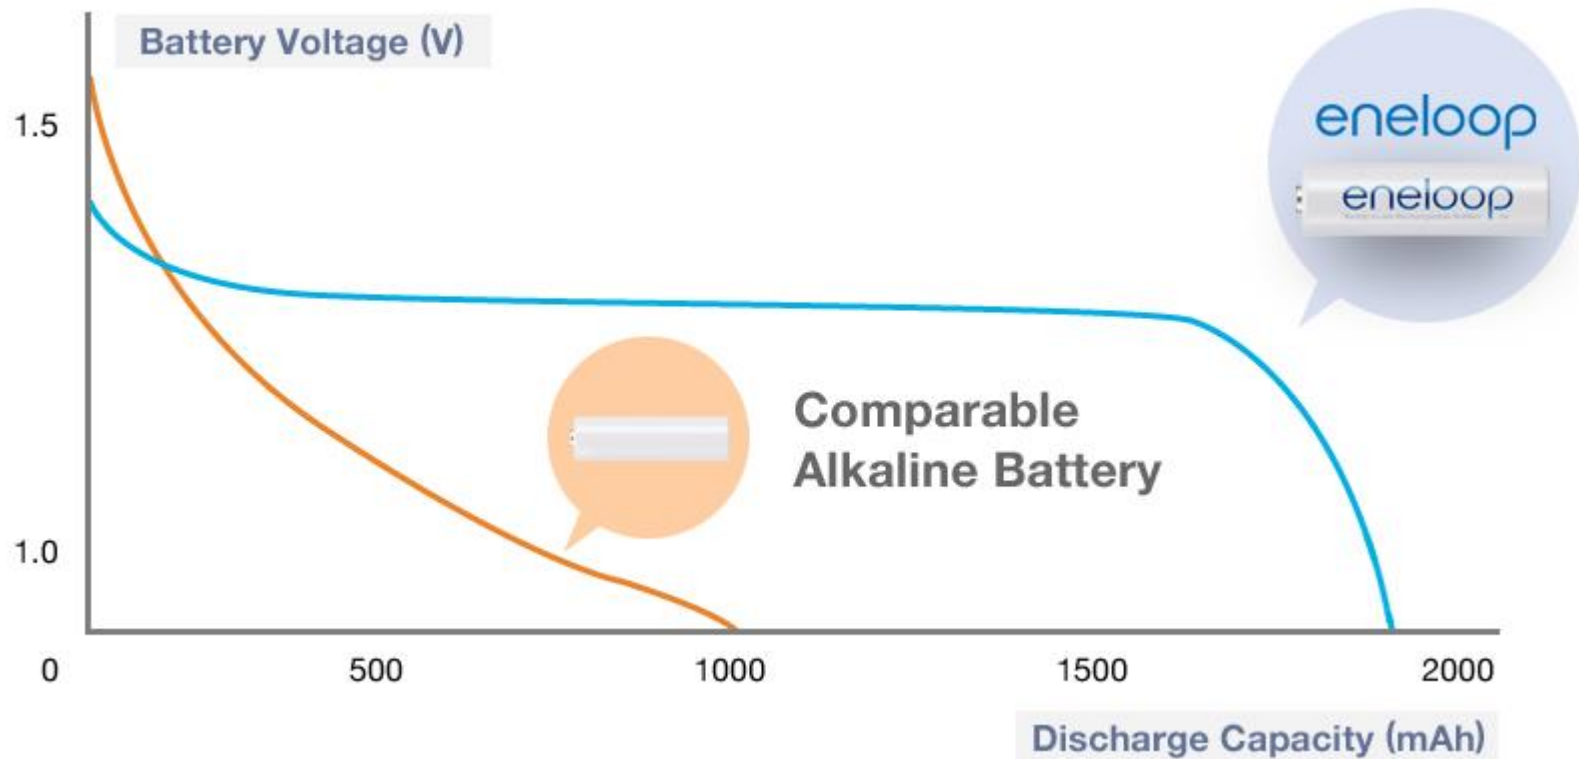


Primary Lithium

- **Pros (Energizer Ultimate Lithium)**
 - Good for high current applications
 - Very long shelf life (20 year shelf life)
 - Will not leak
 - High energy density
 - Adapters available for most HTs
- **Cons**
 - Expensive
 - Single use (non-rechargeable)



Primary Lithium

- Primary Lithium batteries are 1.5v
- AA – Energizer Ultimate Lithium
 - 3,500 mAh

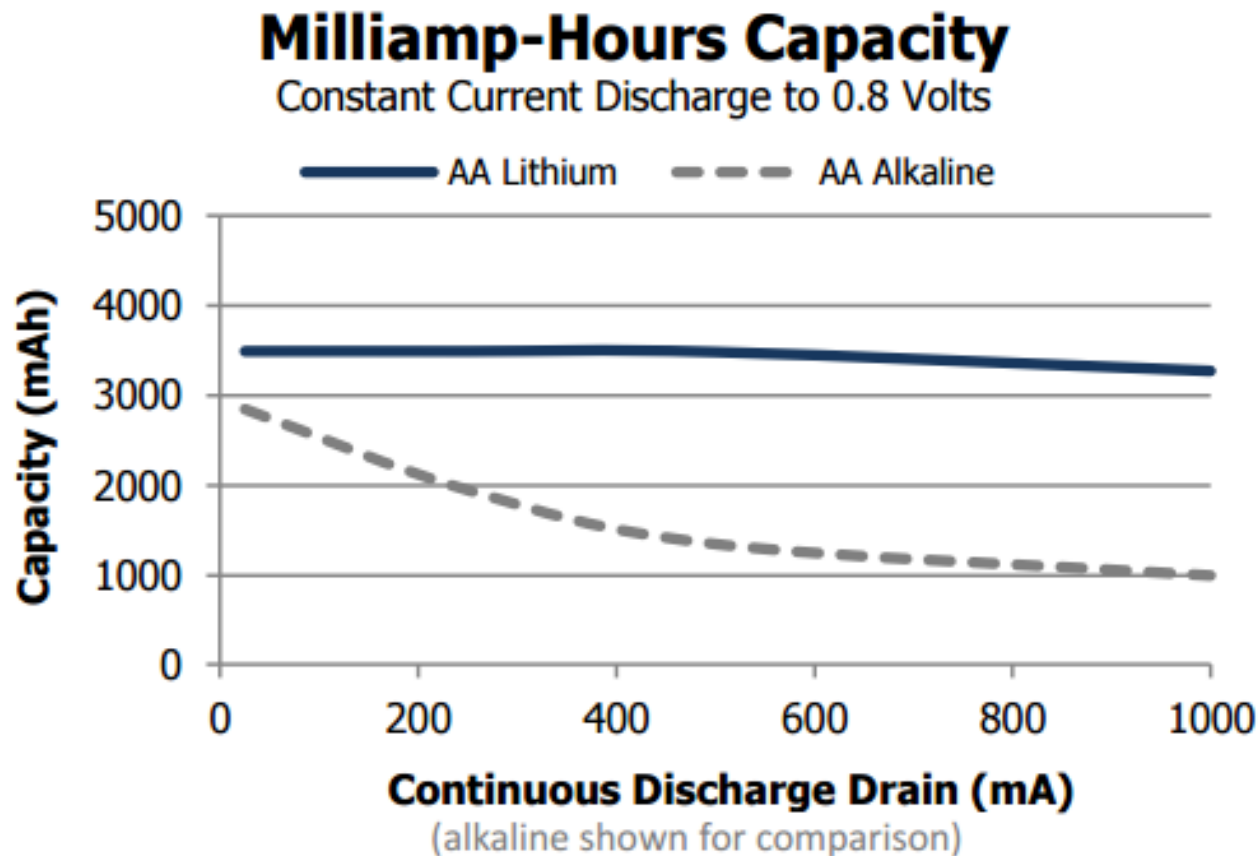

Source: <http://data.energizer.com/>

Rechargeable Lithium Batteries

- **First proposed in 1973**
- **First rechargeable Lithium cell developed in 1980**
- **First commercial Lithium Ion battery developed in 1991**
- **Lithium Iron Phosphate battery proposed 1996**
- **Today Lithium batteries are found in smart phones, laptop computers, tablets, Bluetooth headsets, handi-talkies (HTs), cameras, flashlights, lanterns, power tools, electric bicycles, electric cars and so on**

Lithium Ion

- **Advantages**

- Rechargeable
- Very lightweight
- Able to provide a great deal of energy in a short amount of time
- Very low self-discharge
- Will not leak
- No outgassing
- High energy density



Lithium Ion

- **So why are we so afraid of lithium ion batteries?**

Lithium Ion

- So why are we so afraid of lithium ion batteries?
- Yes, there were those hoverboards that caught on fire



Lithium Ion

- So why are we so afraid of lithium ion batteries?
- Yes, there were those hoverboards that caught on fire
- And those darned mobile phones



Lithium Ion

- So why are we so afraid of lithium ion batteries?
- Yes, there were those hoverboards that caught on fire
- And those darned mobile phones
- And yes, there were even a few electric cars



Lithium Ion

- **So why are we so afraid of lithium ion batteries?**
- **Yes, there were those hoverboards that caught on fire**
- **And those darned mobile phones**
- **And yes, there were even a few electric cars**

- **Hoverboards were using poor quality batteries to keep the costs down**
- **Samsung phone batteries also had quality control issues, but keep in mind, only 0.01% caught fire**
- **5 times more likely to experience a fire in a gasoline powered vehicle**

Lithium Ion

- **18650 batteries**
 - A little bigger than AA batteries
 - 3.7v
 - Recommend using ones with a protection circuit
 - Panasonic NCR18650B (3,400 mAh)
 - LG MJ1 18650F (3,500 mAh)
 - Used in many high output LED flashlights
 - Used in most USB Power Banks
 - Used in most laptop batteries




Li-Ion 18650 (Panasonic NCR18650B)

18650.bt2

▼ X

18650 - 1.5a: 1 Li-ion cell, 3.4 Ah @ 1.50A 18650 - 1.0a: 1 Li-ion cell, 3.4 Ah @ 1.00A 18650 - 0.5a: 1 Li-ion cell, 3.4 Ah @ 0.50A 18650 - 0.25a: 1 Li-ion cell, 3.4 Ah @ 0.25A

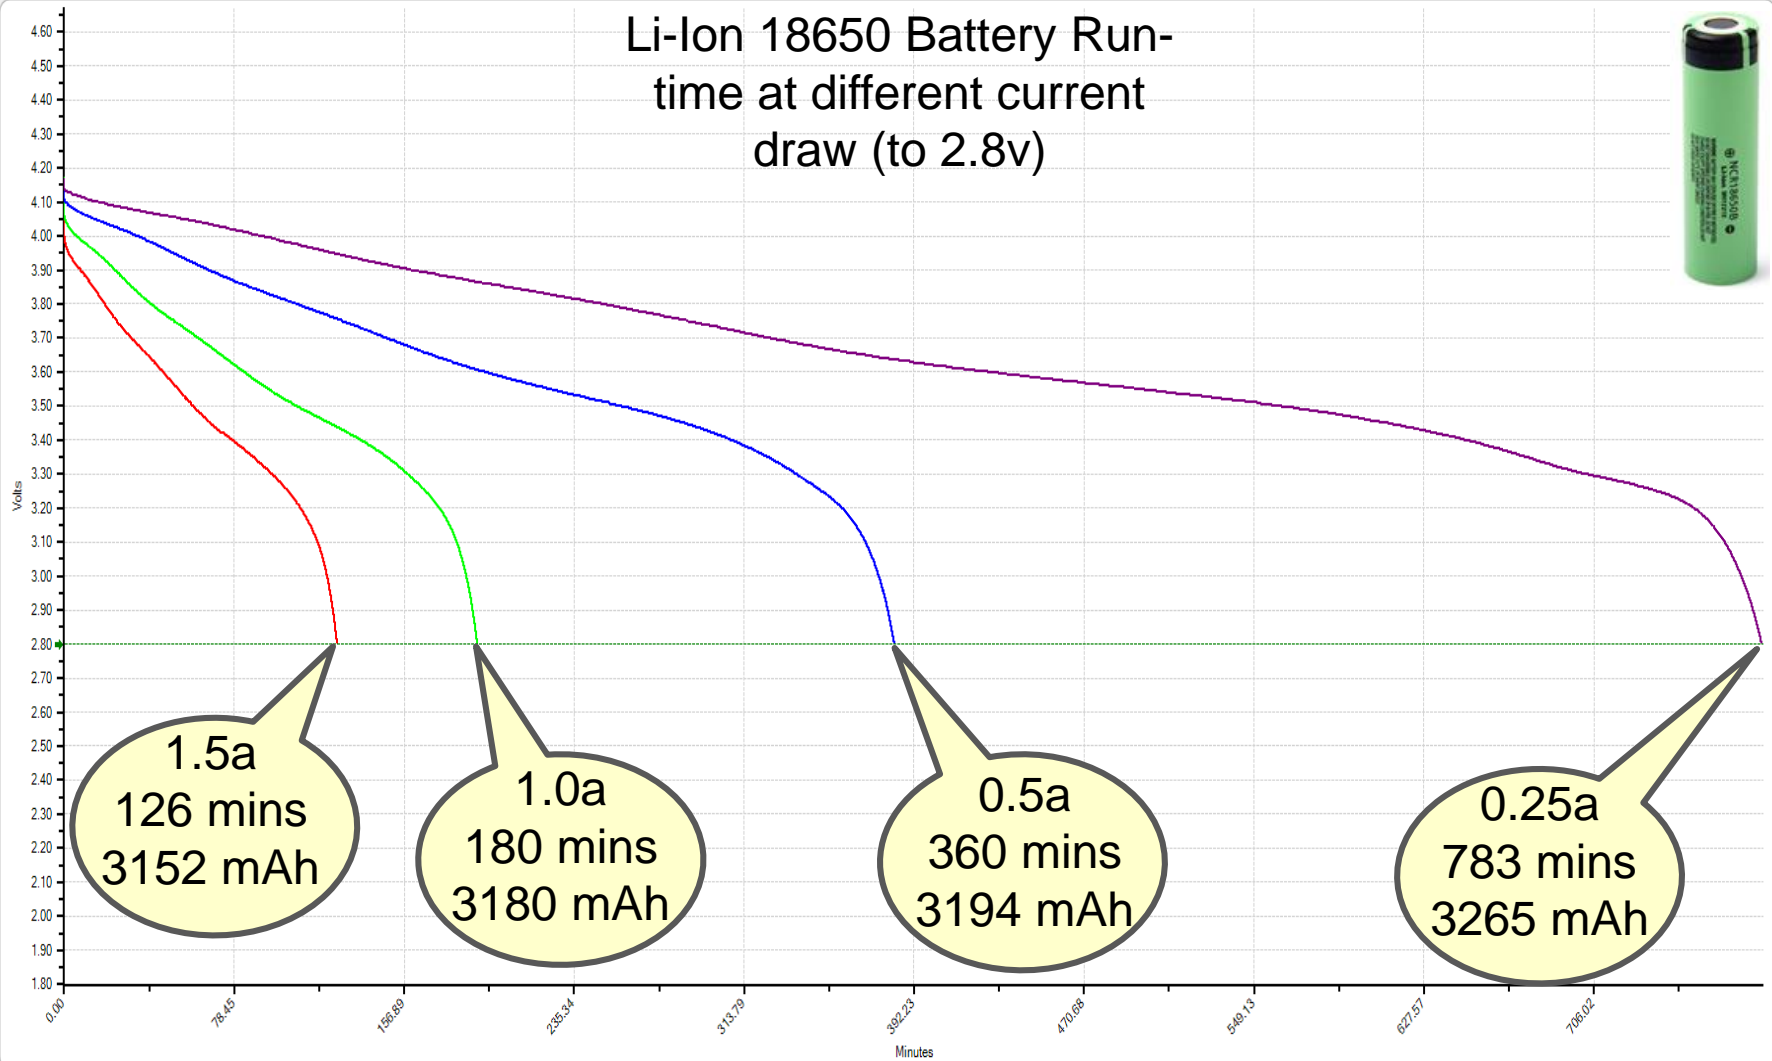

Voltage

3.05

Current

.

AmpHr

3.265

Watts

.

Status

Done

Resistance

5.48

Rachel Kinoshita – KK6DAC

22

Lithium Ion

- 18650 for your FT-60



Test Methodology

- West Mountain Radio Computerized Battery Analyzer (CBA) IV
- WMR CBA Software V2.4.16.0 with Extended License
- Custom (i.e. homemade) interfaces to the various battery packs



Test Methodology

- **Used the Multi-Discharge test using the following settings**
 - Low-Voltage cut-off: 5.5v
 - 1s steps until cut-off voltage is met
 - Three step discharge
 - 5s @ 1.6a (transmit)
 - 22s @ 0.2a (receive)
 - 33s @ 0.02a (idle)
- **All primary/single-use batteries were “fresh”**
- **All secondary/rechargeable batteries were fully charged before testing**

Test Results

FT60 - NiMH 1400 mAh.bt2

— FT-60 NiMH 1400 mAh: 7 NiMH cells Multiple Discharge Profile

FT-60: Std Nickel Metal
Hydride (NiMH) 7.2v 1400
mAh battery (FNB-83)



8.4v to start

Drops to 7.9v
on PTT

5.5v cut-off

5:45:08 at
6v cut-off

6:10:05
1284 mAh

Voltage
6.69

Current
.

AmpHr
1.284

Watts
.

Status
Done

Resistance
1.84

Rachel Kinoshita - KK6DAC


26

Test Results

FT60 - Li-Ion 2500 mAh.bt2

▼ X

— FT-60 Li-Ion 2500 mAh: 2 Li-ion cells Multiple Discharge Profile

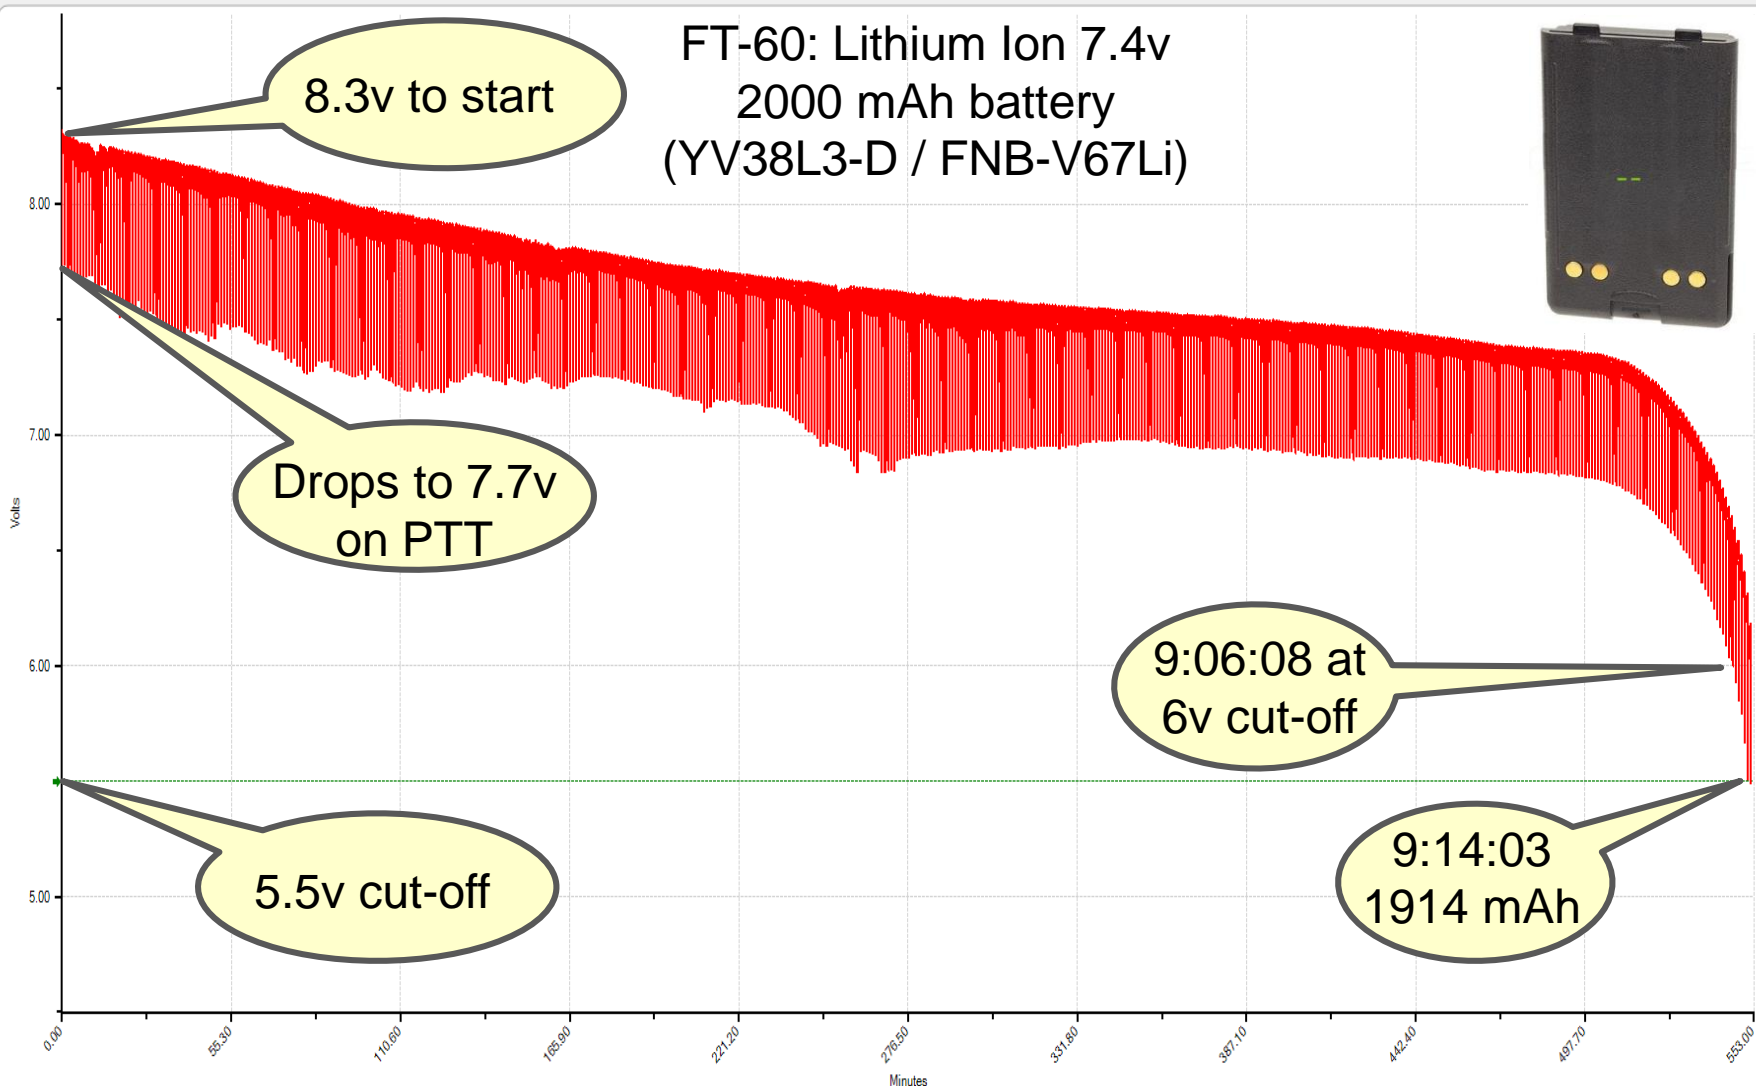

Voltage
6.90

Current
.

AmpHr
1.914

Watts
.


Status
Done

Resistance
2.00

Rachel Kinoshita – KK6DAC

<http://www.cutratebatteries.com/products/standard-ft-60r-battery>

Test Results

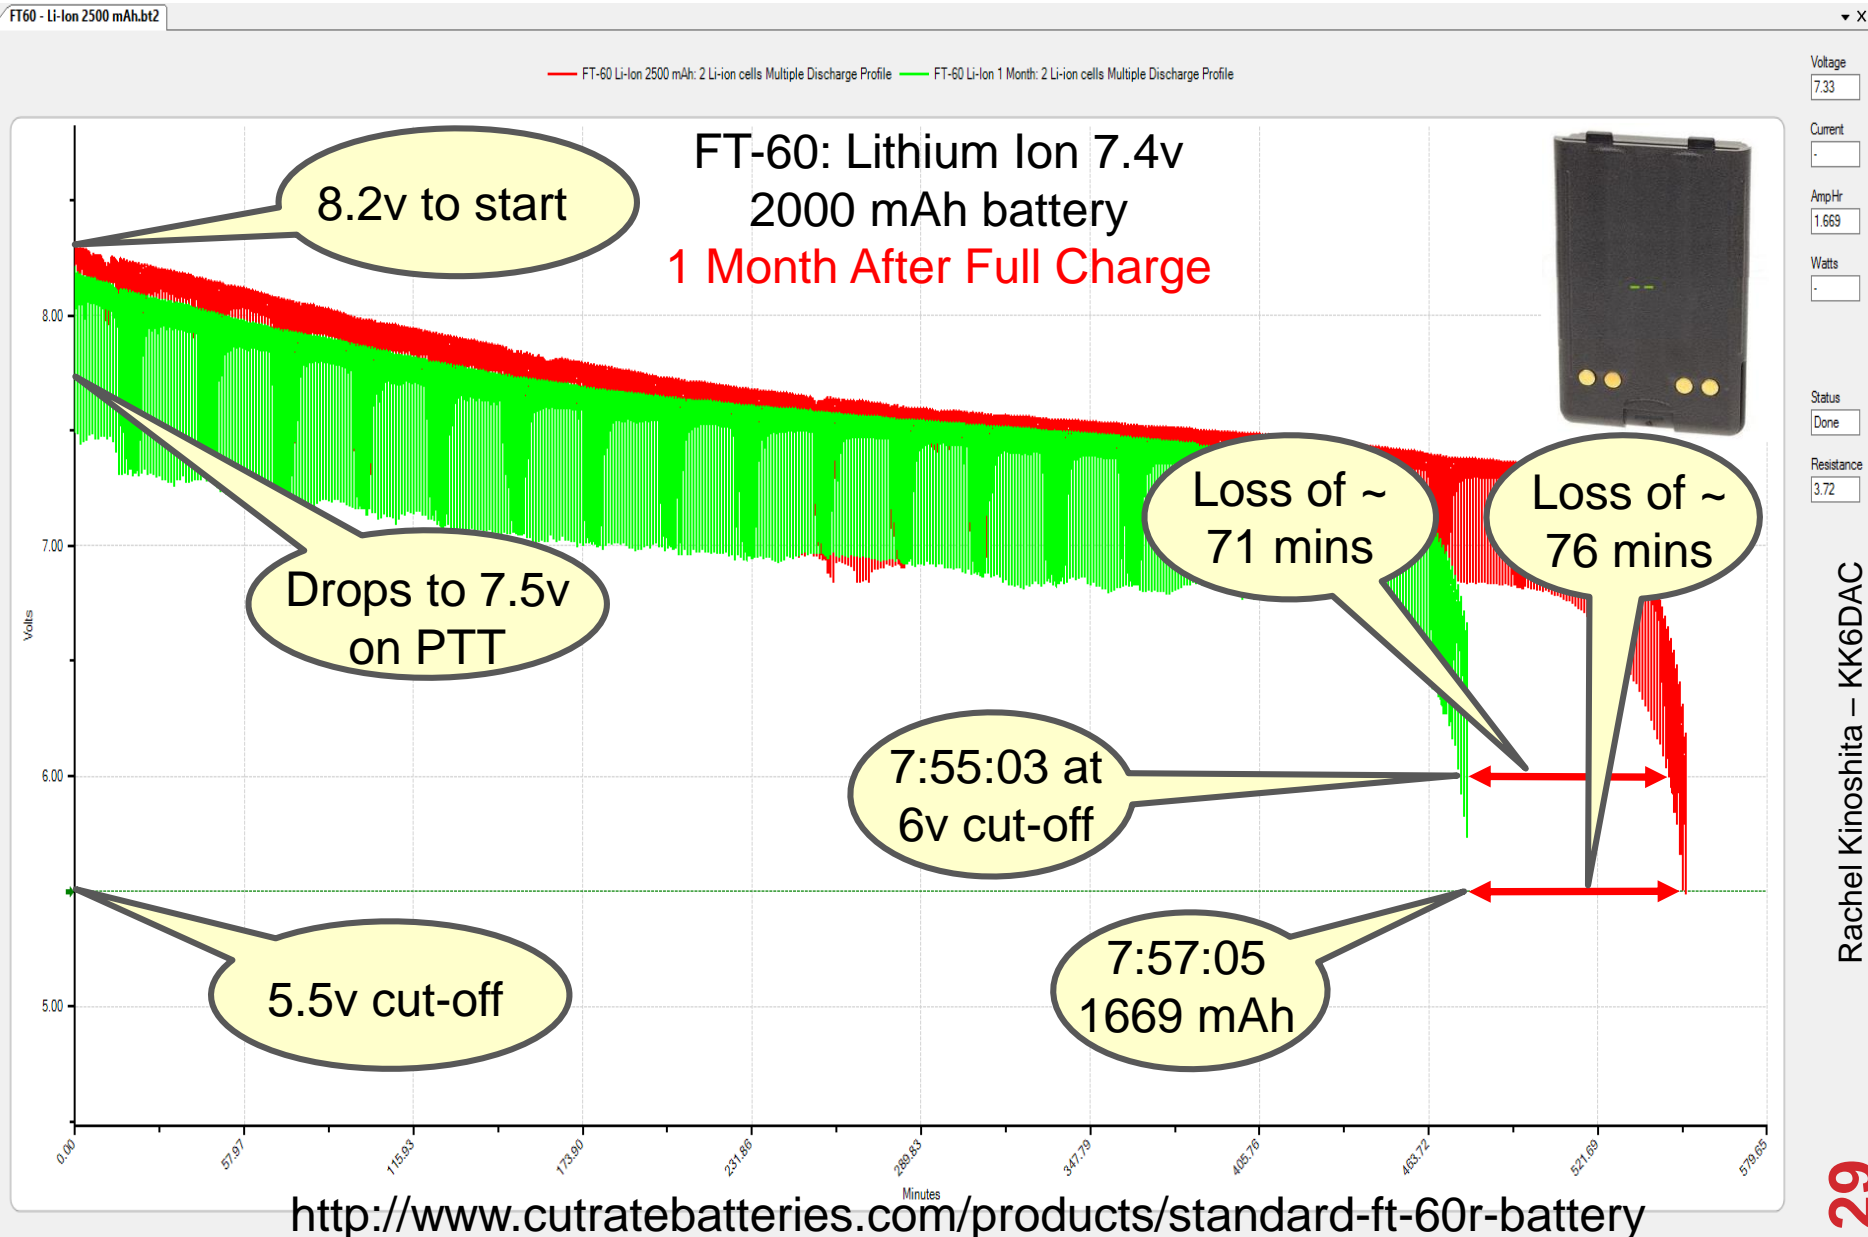

Test Results

Yaesu FT-60 Operating Manual – Page 10

Installation of FBA-25 Alkaline Battery Case


*“Note that the power output and battery life will be **much shorter** when using Alkaline AA cells. They should be considered an emergency backup power source only, for this reason”*



Test Results

Baofeng - 1800 mAh.bt2 FT-60 NIMH 1400.bt2

FT-60 6x AA Alkaline: 6 Alkaline cells Multiple Discharge Profile

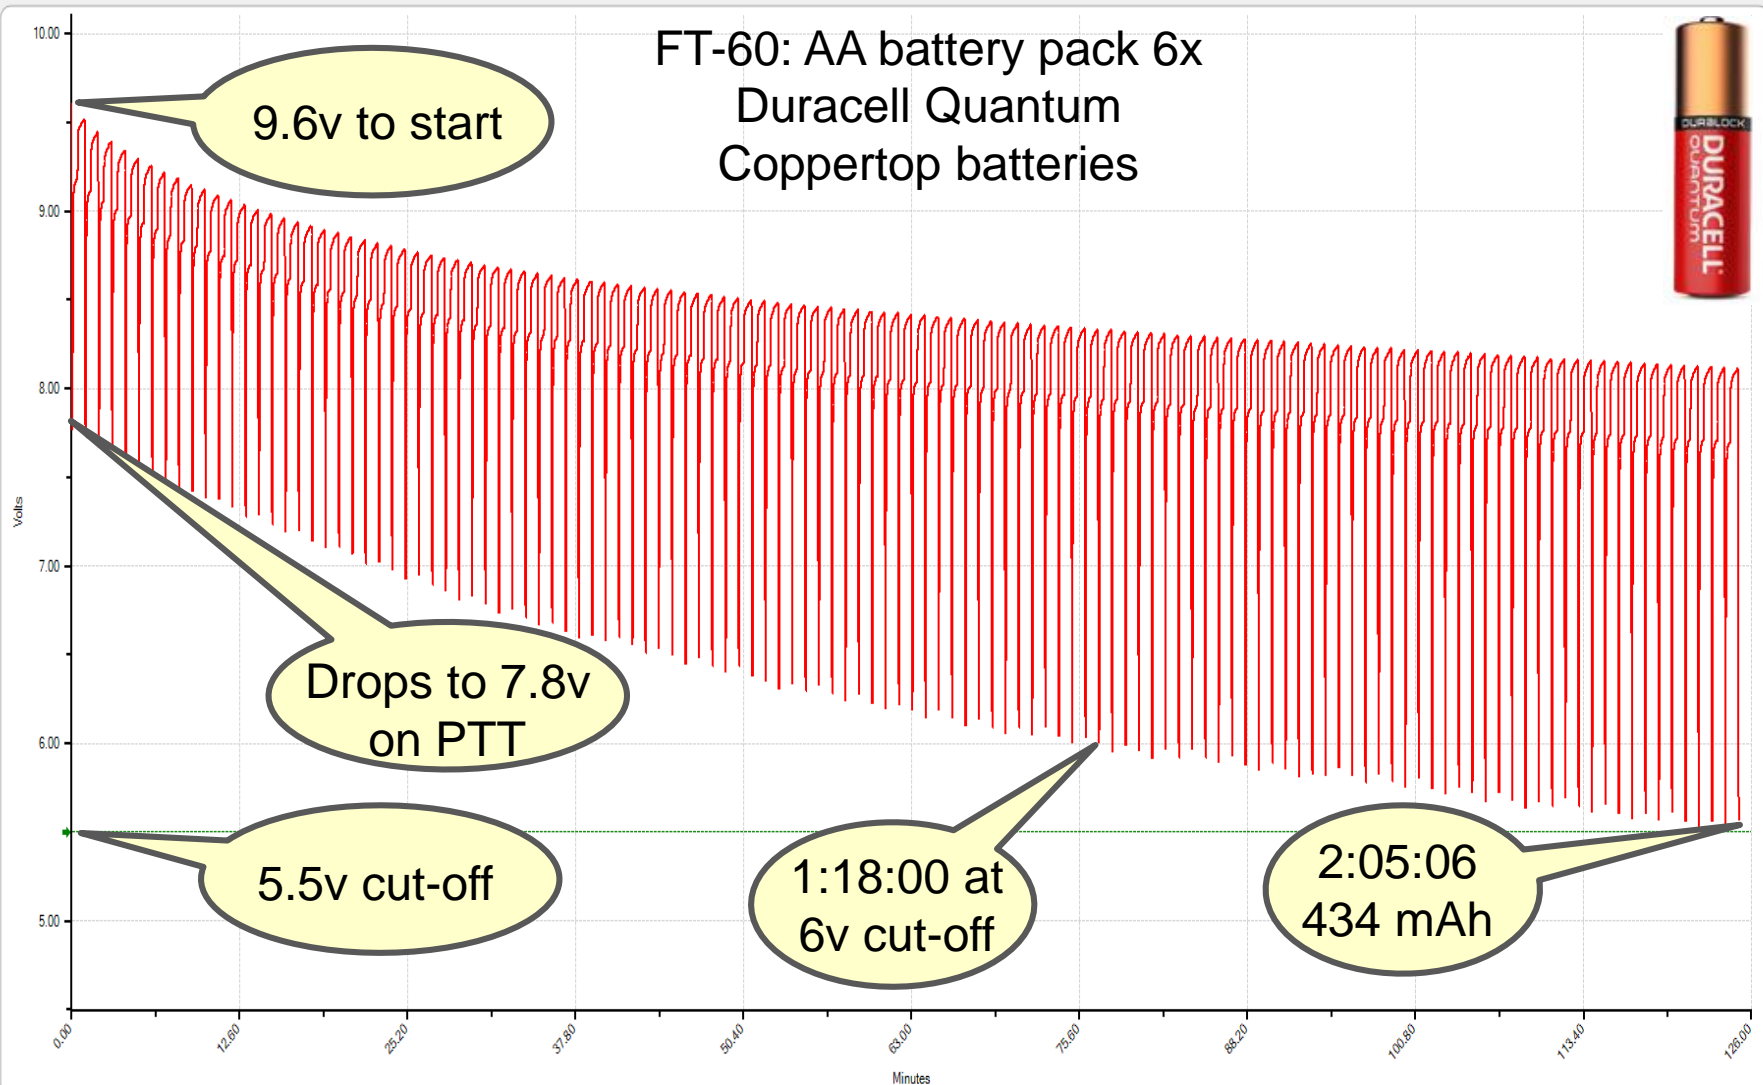

Voltage
8.60
Current
-
AmpHr
0.434
Watts
-
Status
Done
Resistance
2.60


Rachel Kinoshita - KK6DAC

31

Test Results

FT-60 6x AA Ultimate Lithium.bt2

FT-60 6x AA Ultimate Lithium: 6 Alkaline cells Multiple Discharge Profile

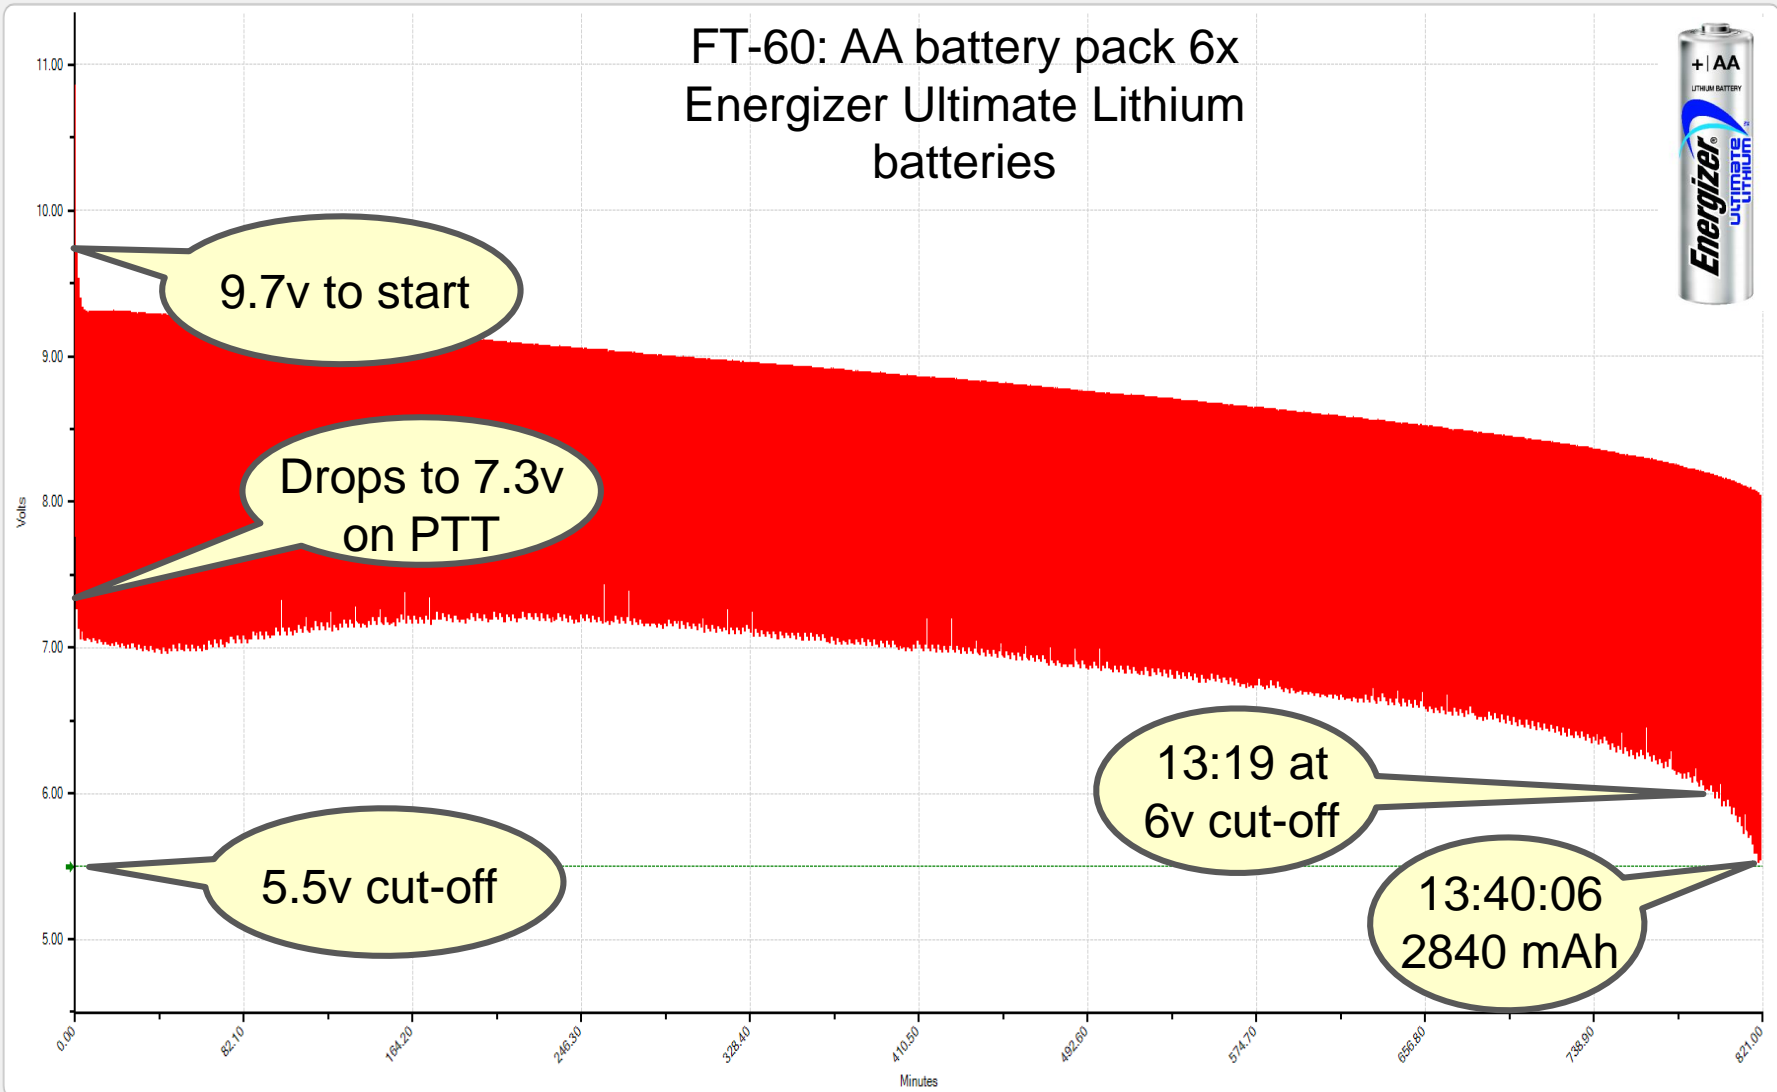

Rachel Kinoshita - KK6DAC

32

Test Results

61 alkaline batteries / \$43.00 / 57.36 oz (3.5 lbs)



=



\$9.00 / 3 oz

Alkaline: 1:18 to 6v

Lithium : 13:19 to 6v

Lithiums last 10.24x
longer than Alkalines

10.24 x 6 batteries = 61

Test Results


Yaesu FT-60 Operating Manual – Page 10

Installation of FBA-25 Alkaline Battery Case

“The **FBA-25A** must not be used with rechargeable cells. The **FBA-25A** does not contain the thermal and over-current protection circuits (provided in the "FNB" series of Ni-MH Battery Packs) required when utilizing Ni-Cd or Ni-MH cells.”



Test Results

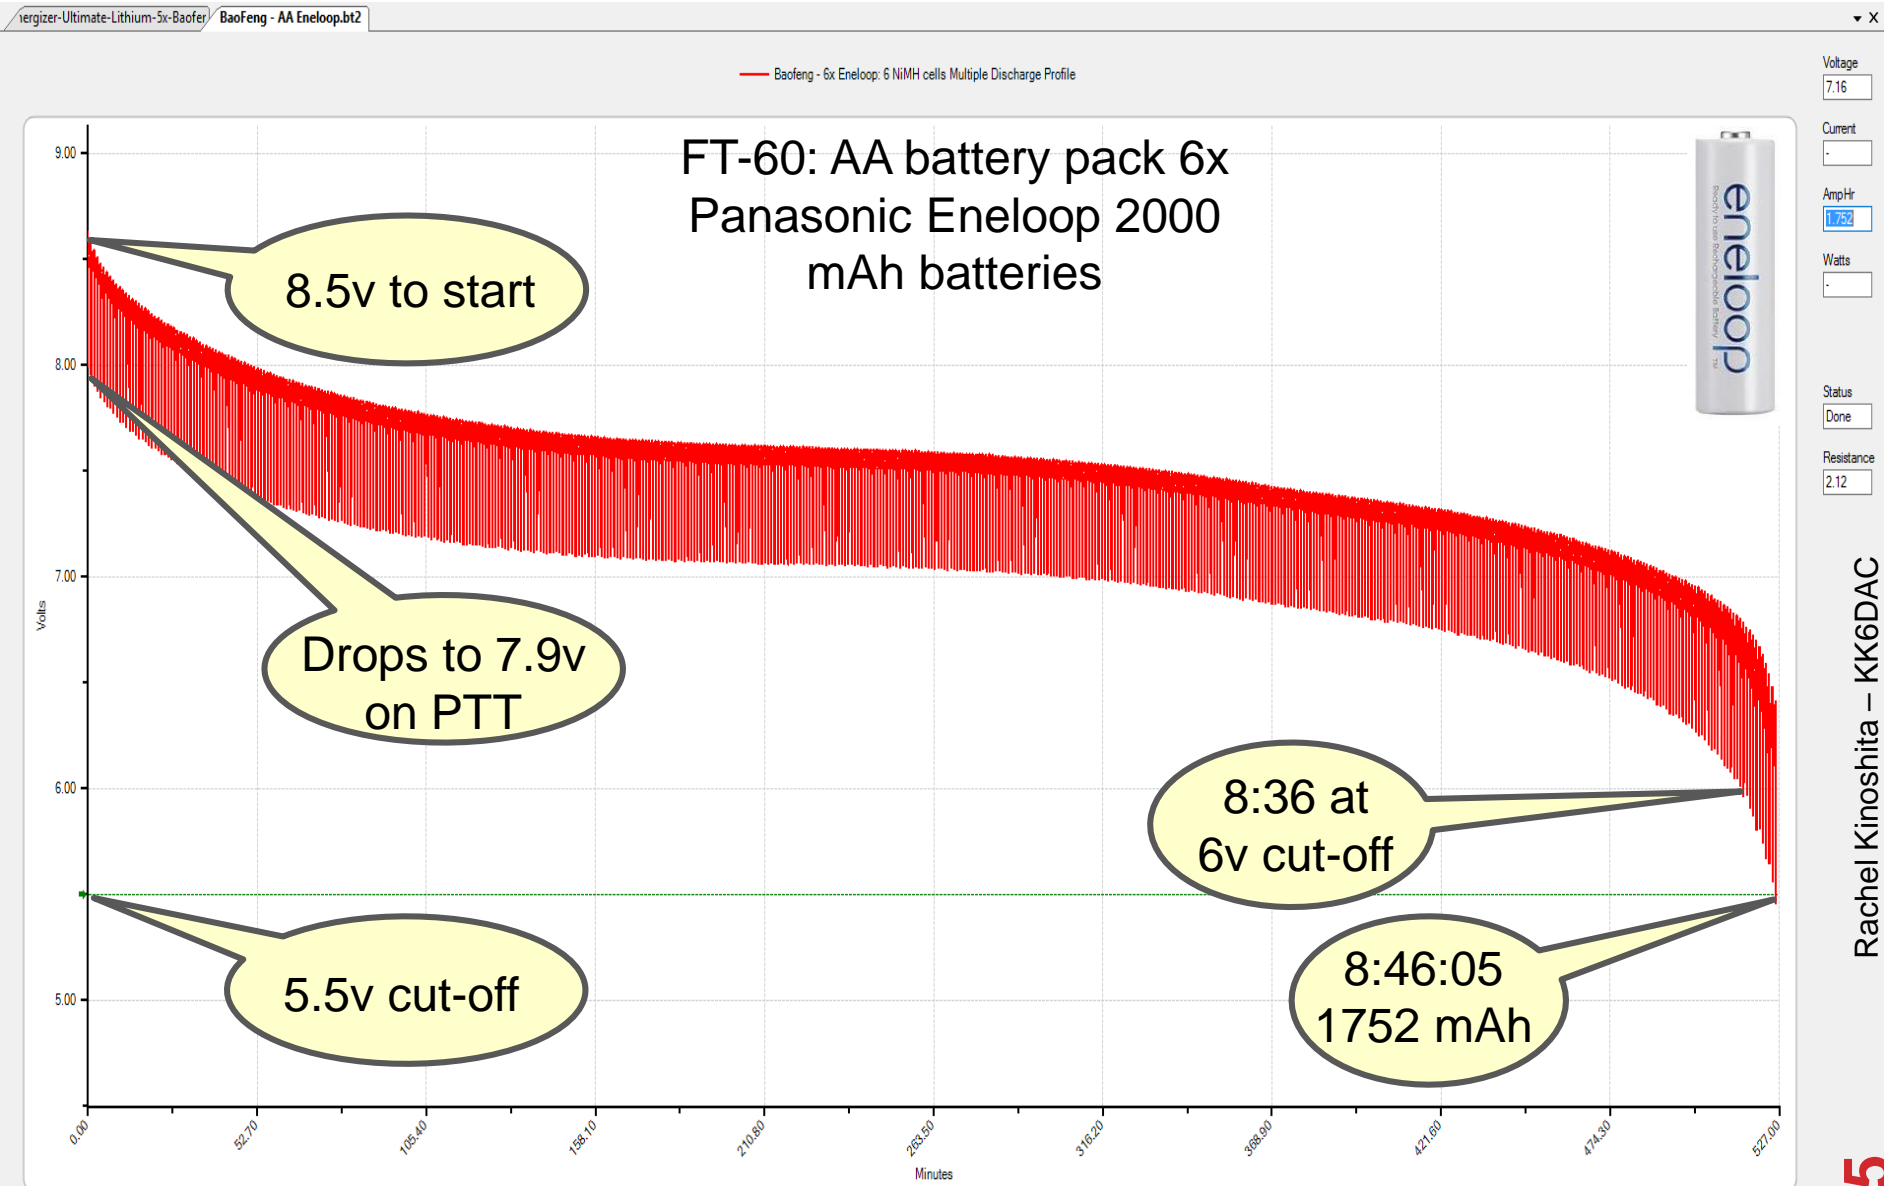

Test Results

40 alkaline batteries / \$27.77 / 37 oz (2.3 lbs)



\$12.00 / 2.7 oz



Alkaline: 1:18 to 6v

NiMH: 8:36 to 6v

NiMHs last 6.62x longer than Alkalines

6.62 x 6 batteries = 39.7

Test Results

40 alkaline batteries / \$27.77 / 37 oz (2.3 lbs)




But wait, the Eneloop's are
rechargeable up to 2100 times



\$12.00 / 2.7 oz

Test Results

\$58,320 / 2.43 tons

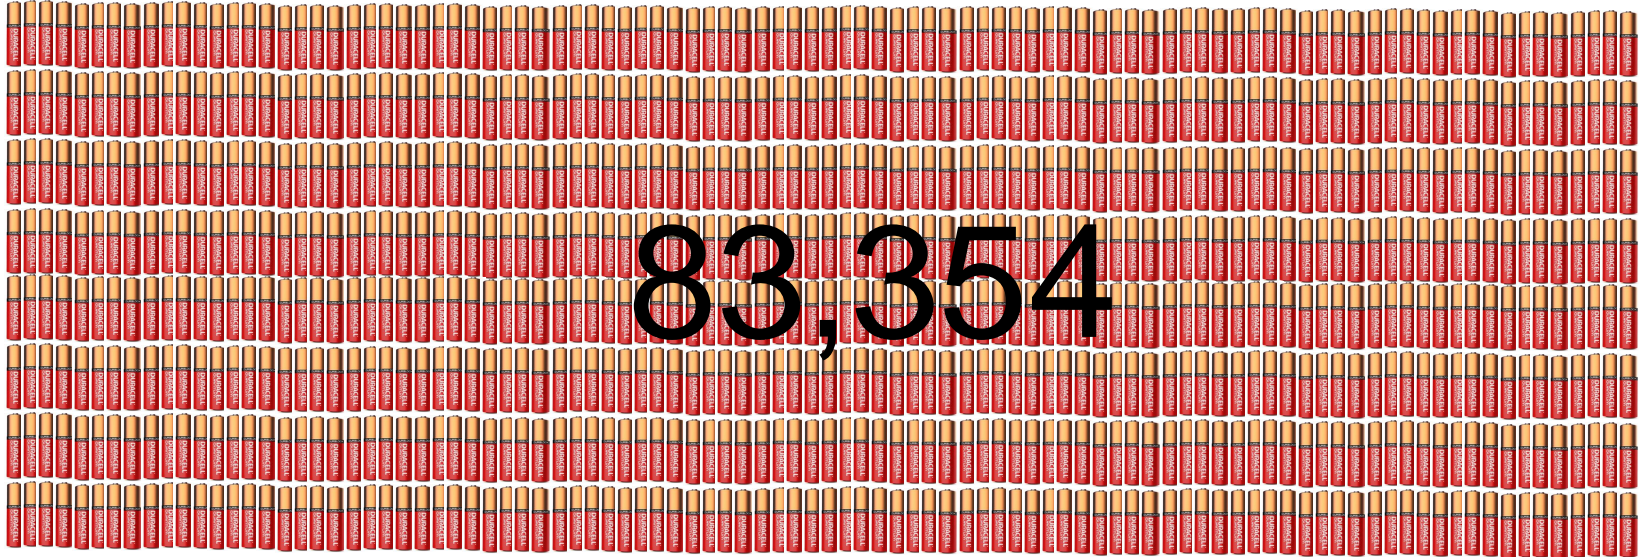

=




\$12.00 / 2.7 oz
(plus \$50.40 to recharge
then 2100 times)

- It takes 20Wh or 0.02 kWh to charge one Eneloop
- All six would take 0.12 kWh
- We pay an average of \$0.20 per kWh
- Charging all six batteries costs less than 2 ½ ¢
- To recharge them 2100 times would cost \$50.40

Test Results

\$12,206 / 254 lbs

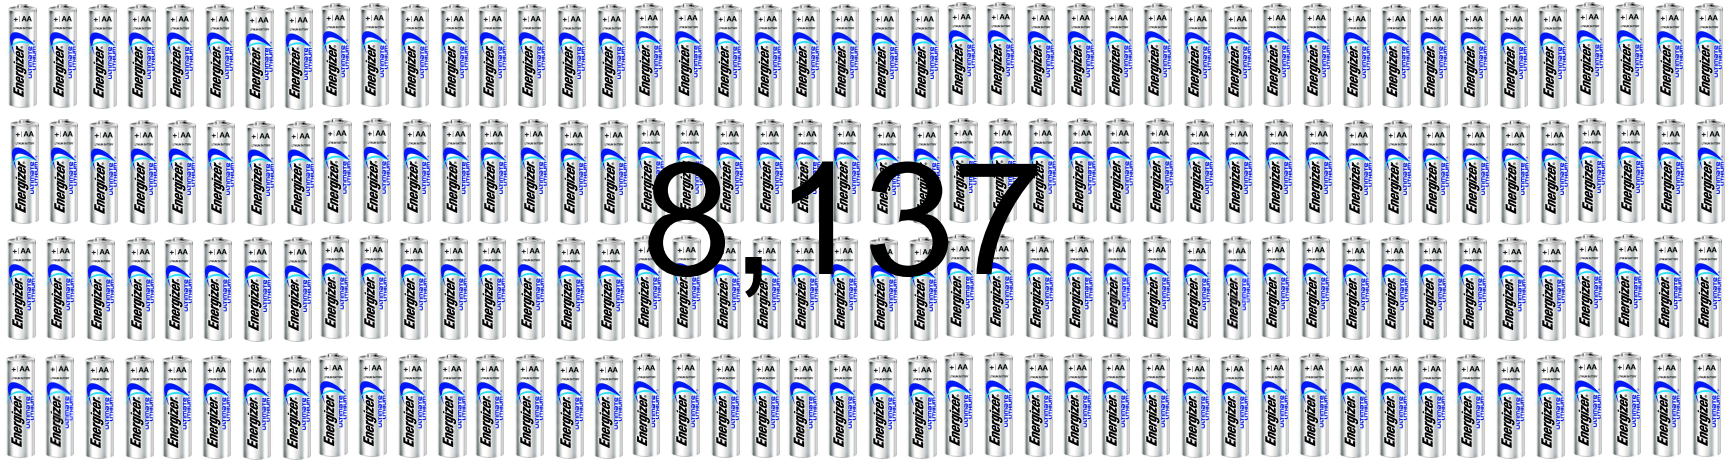

\$12.00 / 2.7 oz
(plus \$50.40 to recharge
then 2100 times)

- It takes 20Wh or 0.02 kWh to charge one Eneloop
- All six would take 0.12 kWh
- We pay an average of \$0.20 per kWh
- Charging all six batteries costs less than 2 ½ ¢
- To recharge them 2100 times would cost \$50.40

Test Results

Baofeng - 1800 mAh.bt2

Baofeng 1800 mah: 2 Li-ion cells Multiple Discharge Profile

Baofeng: Std battery pack
1800 mAh Lithium Ion
battery




8.25v to start

Drops to 7.5v
on PTT

5.5v cut-off

6:33:05
1314 mAh

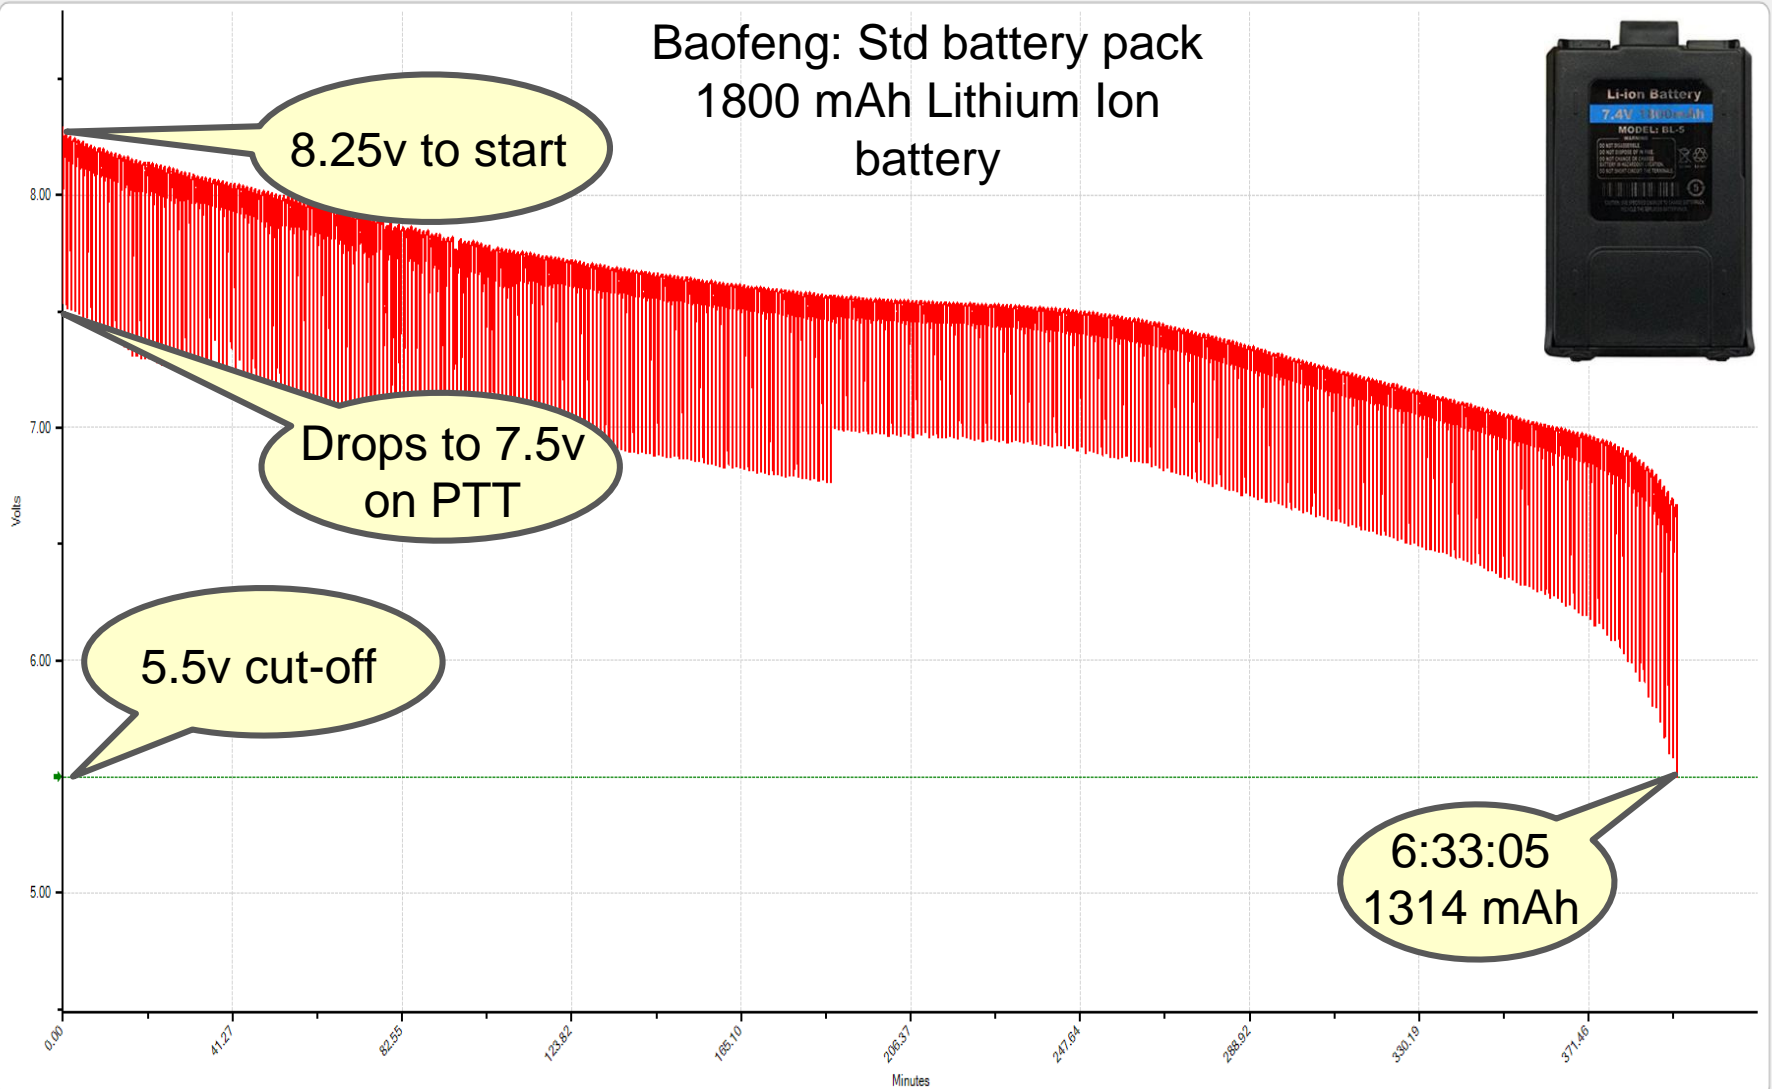

Voltage

Current

AmpHr

Watts

Temp

Status


Rachel Kinoshita - KK6DAC

40

Test Results

Baofeng - 3400 mAh.bt2

Baofeng - 3400 mAh: 2 Li-ion cells Multiple Discharge Profile

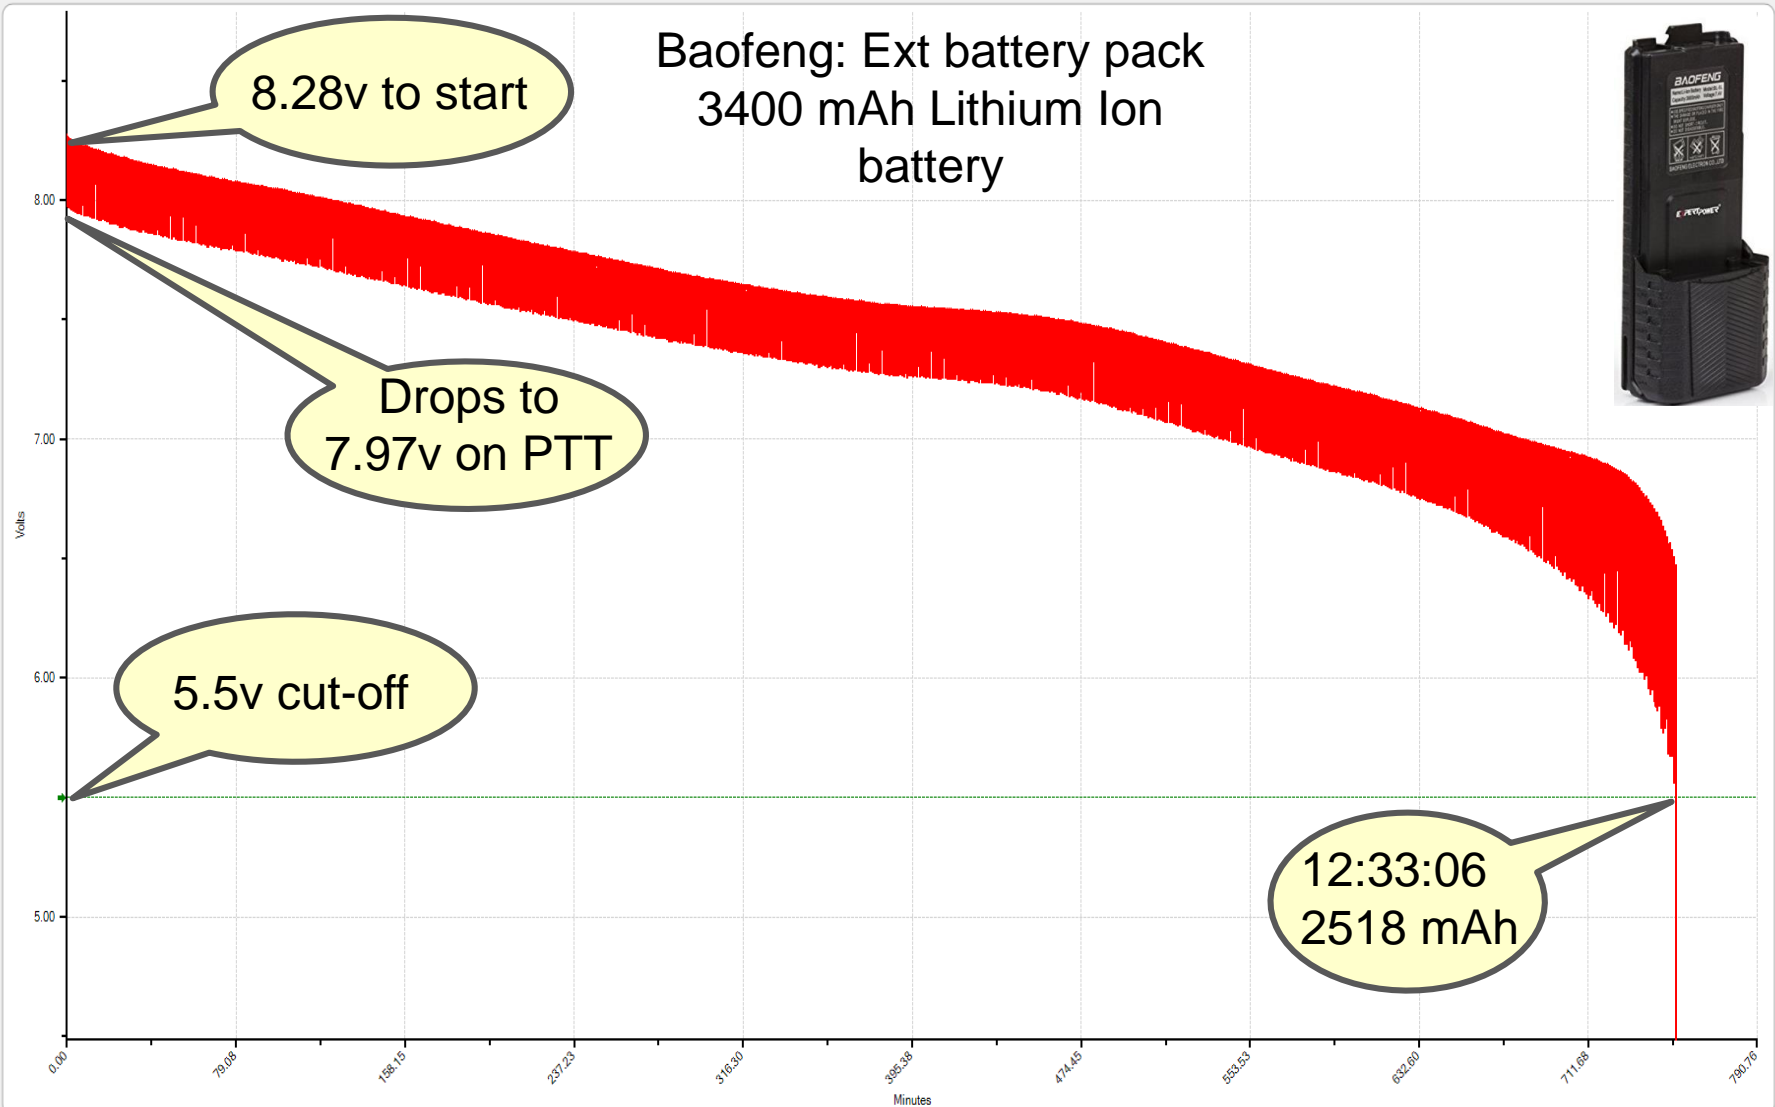


Voltage
Current
AmpHr
2.518
Watts
Temp
Status

Rachel Kinoshita - KK6DAC

Test Results

Baofeng BL-5 AA Battery Pack
Uses 5x AA alkaline batteries
(7.5v) plus an included dummy
cell or 6x AA NiMH batteries
(7.2v)



Unlike the FT-60 which can handle voltages from 9v to 6v, a Baofeng won't transmit if the battery voltage is higher than about 8v.

Test Results

AA-Duracell-5x-Baofeng.bt2

Baofeng Alkaline: 5 Alkaline cells Multiple Discharge Profile

8v to start

Drops to 6.4v
on PTT

5.5v cut-off

Baofeng: AA battery pack
5x Duracell Quantum
Coppertop batteries



0:50:05
152 mAh


Voltage
-
Current
-
AmpHr
0.152
Watts
-
Temp
-
Status
-

Rachel Kinoshita – KK6DAC

Test Results

rgizer-Ultimate-Lithium-5x-Baofe

Baofeng - Energizer-Lith: 5 Alkaline cells Multiple Discharge Profile

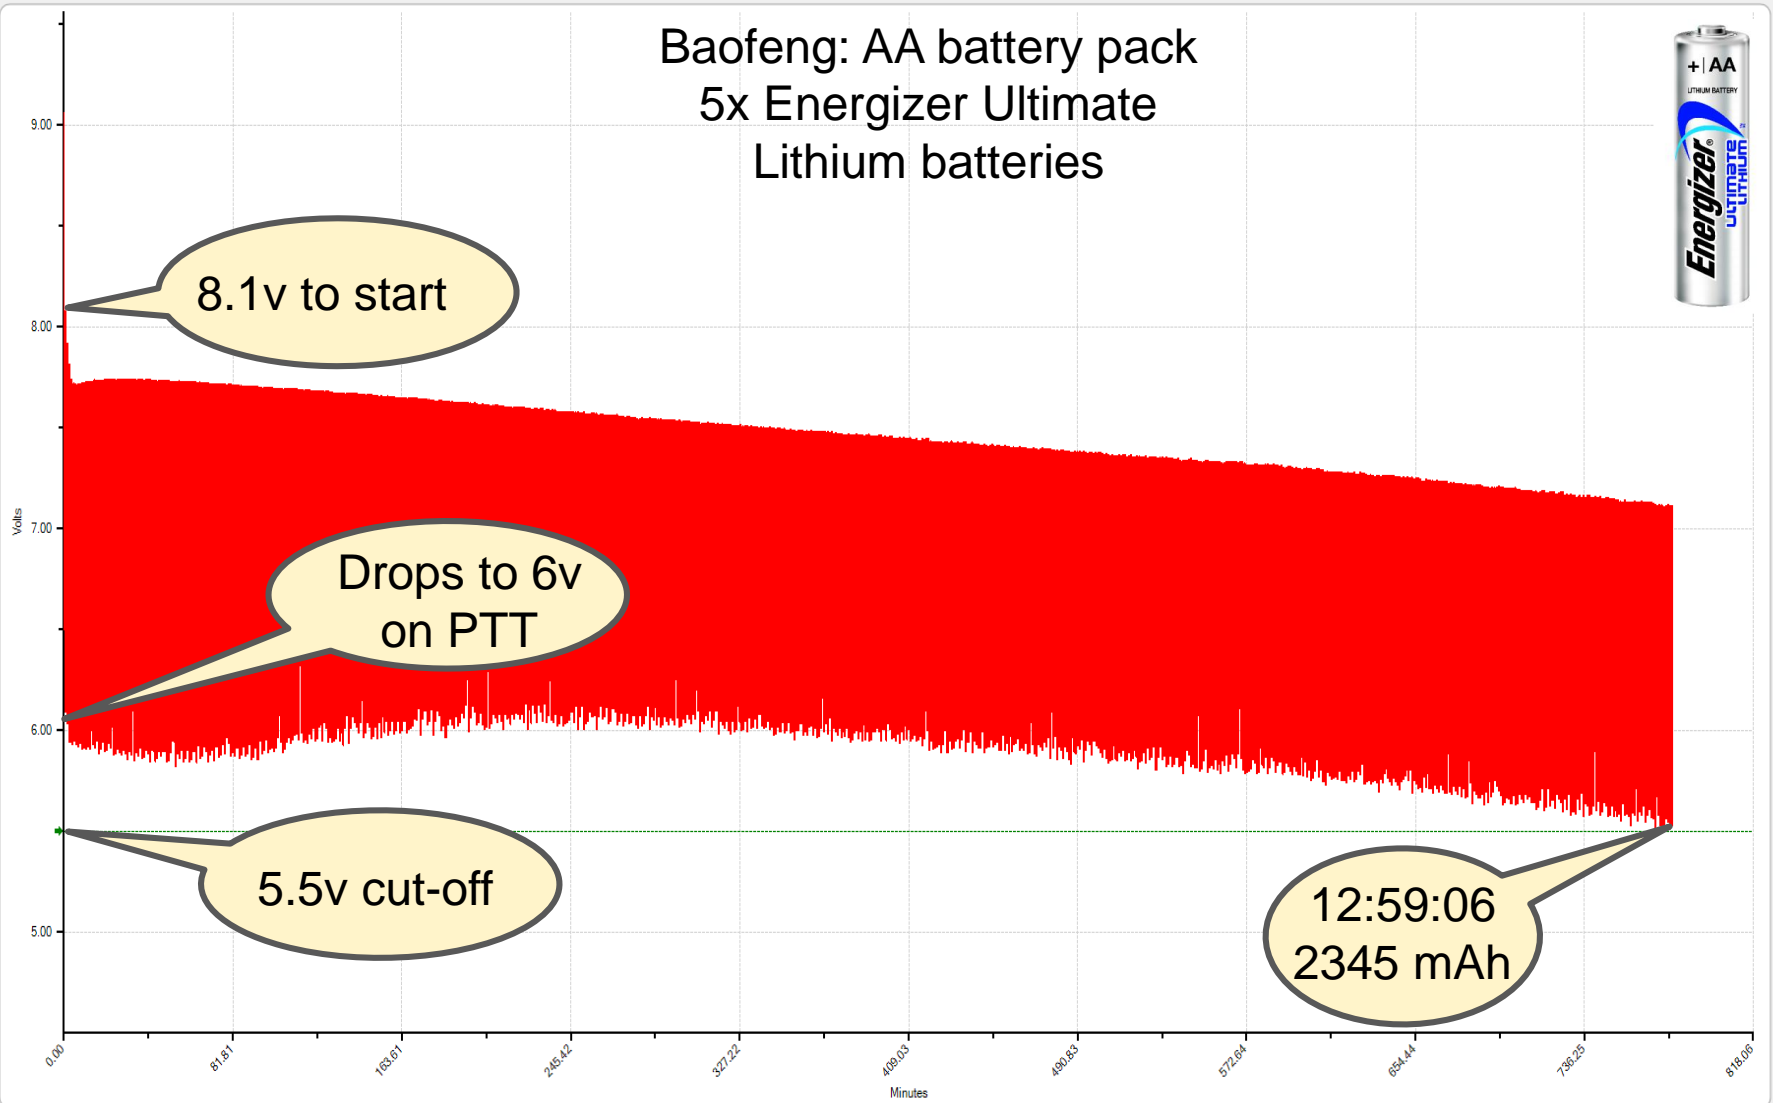

Voltage
Current
AmpHr
Watts
Temp
Status

Rachel Kinoshita – KK6DAC

44

Test Results

78 alkaline batteries / \$54.60 / 73.32 oz (4.6lbs)



\$7.50 / 2.5 oz




Alkaline: 0:50 to 6v

Lithium : 12:59 to 6v

Lithiums last 15.58x
longer than Alkalines

15.58 x 5 batteries = 78

Test Results

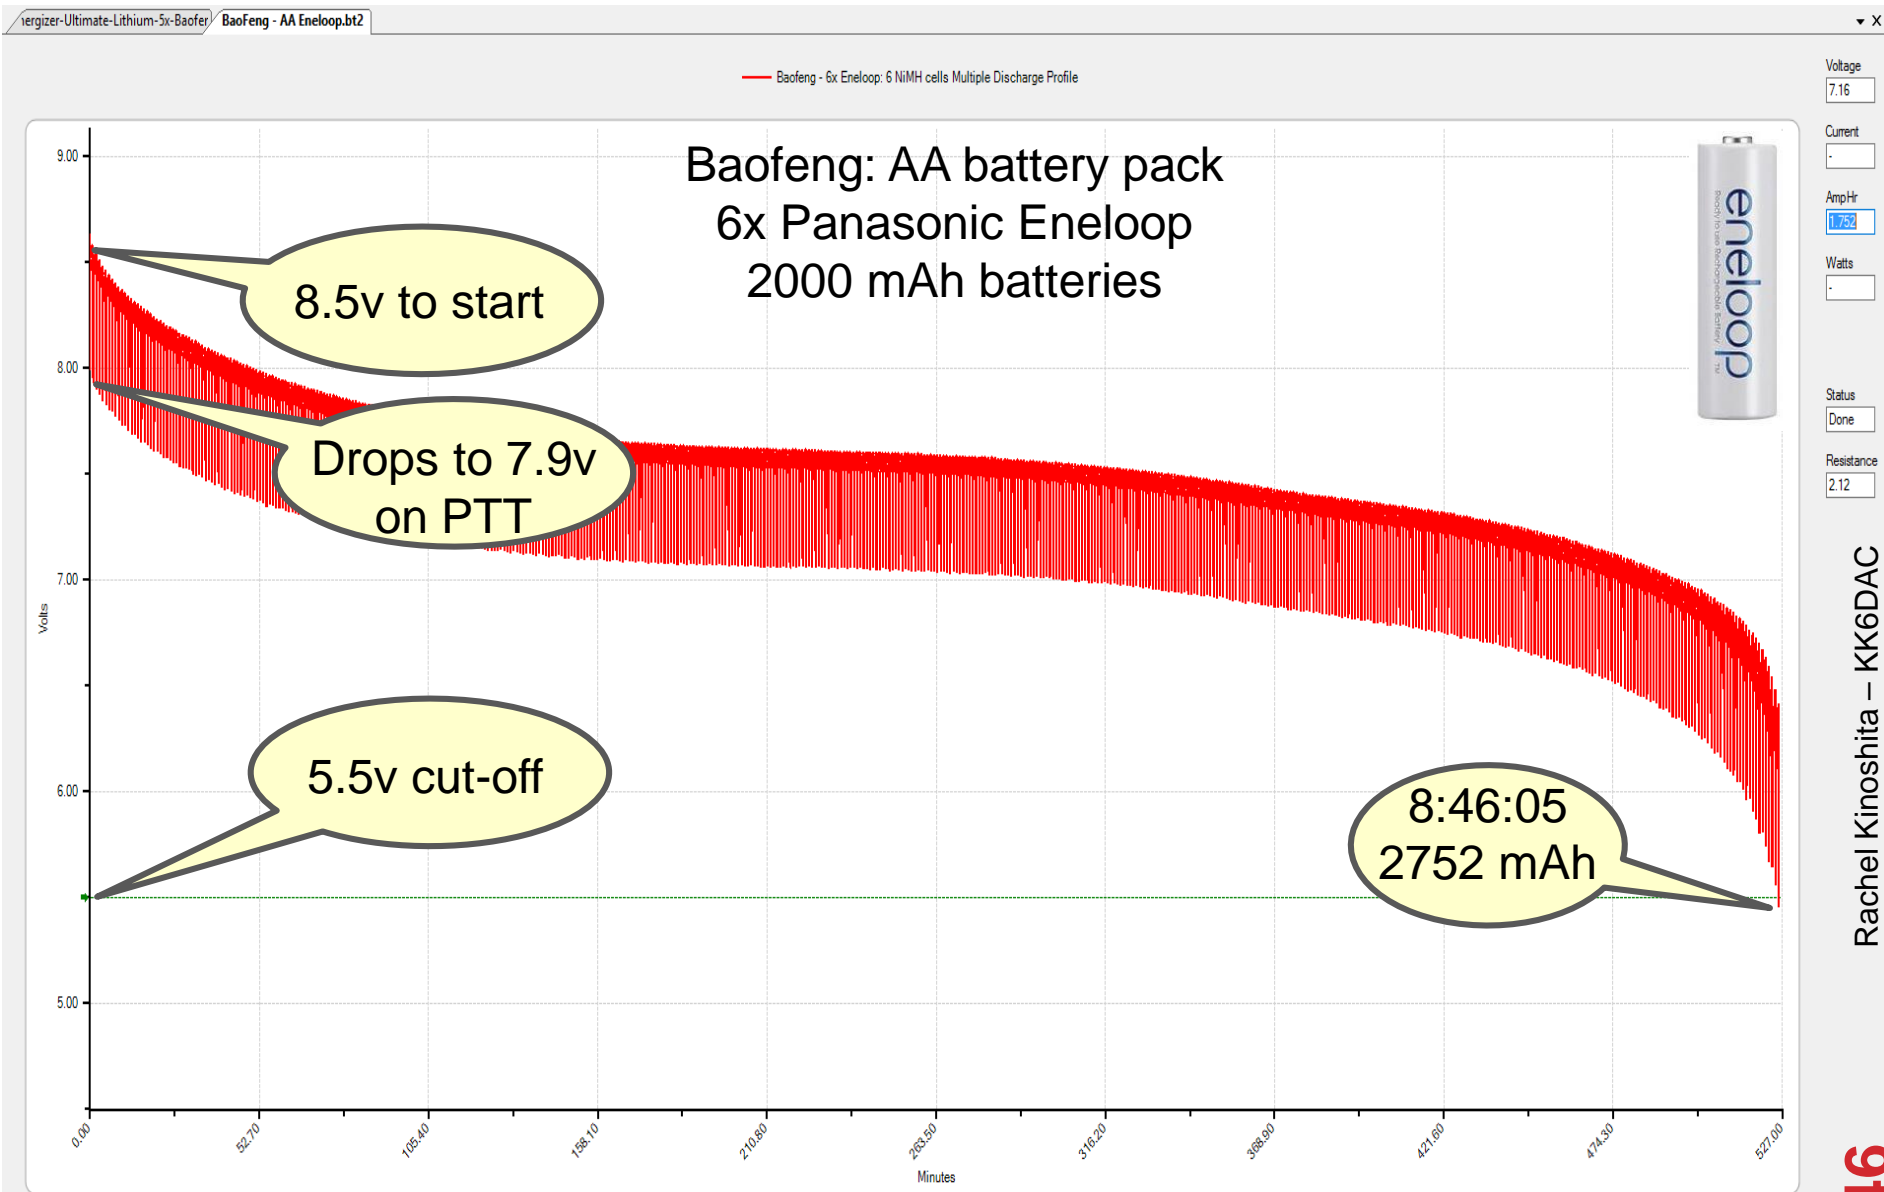

Test Results

53 alkaline batteries / \$37.10 / 49.82 oz (3.11 lbs)



\$12.00 / 2.7 oz

Alkaline: 0:50 to 6v


NiMH: 8:46 to 6v

NiMHs last 10.52x longer
than Alkalines

10.52 x 5 batteries = 52.6

Test Results

\$77,322 / 3.25 tons

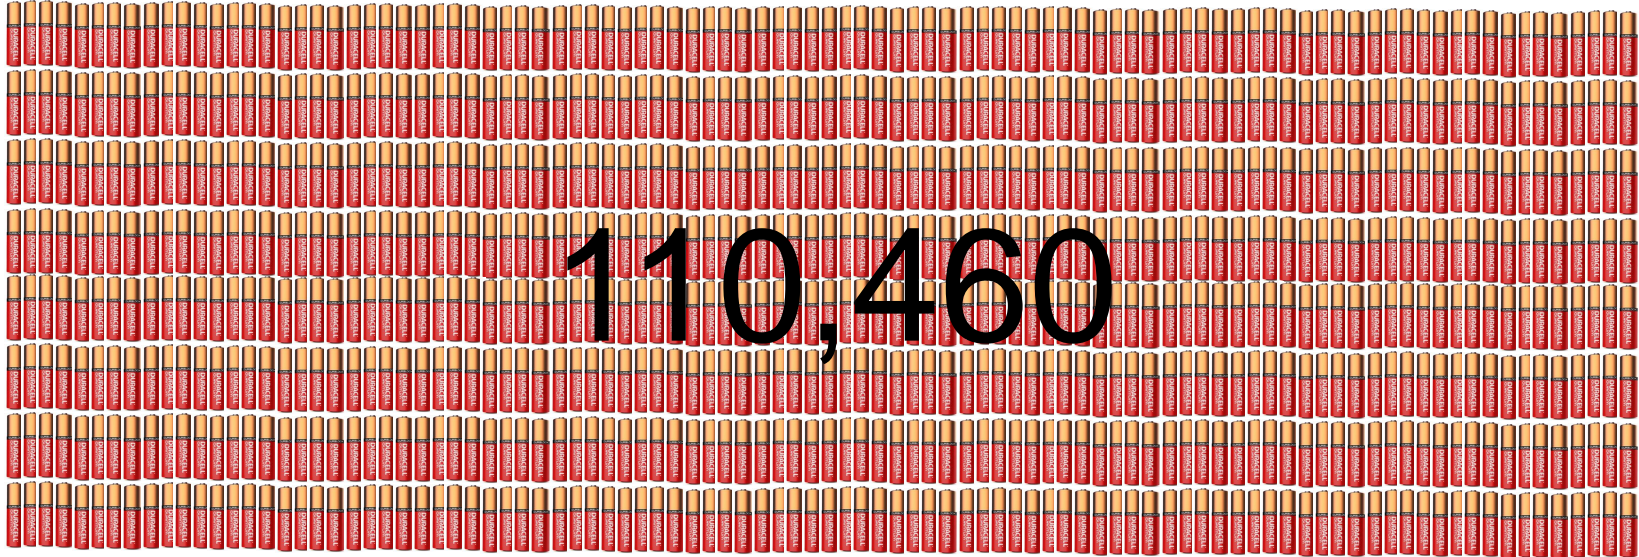

=



\$12.00 / 2.7 oz
(plus \$50.40 to recharge
then 2100 times)

- It takes 20Wh or 0.02 kWh to charge one Eneloop
- All six would take 0.12 kWh
- We pay an average of \$0.20 per kWh
- Charging all six batteries costs less than 2 ½ ¢
- To recharge them 2100 times would cost \$50.40

Conclusion

- **Use the highest capacity Li-Ion battery available for your radio**
- **When using the AA adapter**
 - Alkaline batteries are the worst choice. Use as the last resort
 - Energizer Ultimate Lithium batteries are the best choice for single-use batteries
 - Extremely low self-discharge (95% of capacity after 20 years)
 - Handles high current discharge
 - About \$1.50 per battery
 - Panasonic Eneloop batteries are the best choice for rechargeable batteries
 - Relatively low self-discharge (85% of charge after 1 year)
 - Can be recharged up to 2100 times
 - Handles high current discharge
 - About \$2.00 per battery
 - ***Never charge from the radio***

Small Battery Chargers

- **Maha PowerEx MH-C808M**
 - Can charge any combination of 8 AAA, AA, C, D (MaHa MH-C801D or MH-C800S if you only want to charge AA and AAA)
 - Fast and slow charge mode
 - Requires 120vac
- **NiteCore D4**
 - Can charge any combination of 4 AA, AAA, AAAA, C, 26650, 22650, **18650**, 17670, 18490, 17500, 18350, 16340, 14500, 10440
 - Can charge from either 120vac or 12vdc (adapter included)
- **Xtar Dragon VP4**
 - Can charge any combination of 4 AAAA, AAA, AA, A, SC, C, D, 10440, 14500, 14650, 16340, 17335, 17500, 17670, 18350, 18490, 18500, **18650**, 22650, 2550, 26650, 32650
 - 0.5a to 2.0a charging modes
 - Can charge from either 120vac or 12vdc (adapter included)



12v Batteries

- **Why 12v batteries**
 - Mobile radios
 - Recharge HT radios, mobile phones, tablets, laptops, rechargeable batteries, lighting, television, etc
 - Easy to charge from solar or from your car
- **Lots of different size batteries available from small 7Ah sealed lead acid (SLA) to large 100+Ah absorbed glass mat (AGM)**
- **Different chemistries available include lead acid, lithium iron phosphate (LiFePO₄), Lithium-Ion...you can even make a 12v battery from alkaline or NiMH batteries**
- **Amp Hour Measurement is typically at 20 hours**
 - Peukert Effect
 - As the discharge amps increase, the batteries available capacity decreases

Batteries

➤ Capacity (Amp Hour Rating)

- How many amps can be delivered over a period of time before the battery is completely dead

CAPACITY ^B Amp-Hours (AH) Trojan Group 27 - 100 AH AGM Battery				ENERGY (kWh)
5-Hr Rate 15.4 amps	10-Hr Rate 8.2 amps	20-Hr Rate 4.45 amps	100-Hr Rate 1 amp	100-Hr Rate
12 VOLT DEEP CYCLE AGM BATTERY				
77	82	89	99	1.19

Lead Acid

- Flooded (Automobile starter, Maintenance free, Deep cycle, Golf cart batteries)

- Peukert constant = 1.6



- Sealed Lead Acid

- Gel

- Peukert constant = 1.25



- Absorbed Glass Matte (AGM)

- Peukert constant = 1.15



Lead Acid

- **Pros**


- Flooded (Automobile starter, Maintenance free, Deep cycle, Golf cart batteries)
 - Proven technology
 - Relatively inexpensive
- Sealed/Gel
 - No outgassing
 - Can be installed in any position
- Absorbed Glass Matte (AGM)
 - No outgassing
 - Can be installed in any position
 - Relatively long life (5+ years)

- **Cons**

- Flooded
 - Heavy
 - Outgas
 - Spill hazard
- Sealed/Gel
 - Heavy
- AGM
 - Heavy
 - Expensive

Lead Acid

12v Lead Acid Voltage Curve

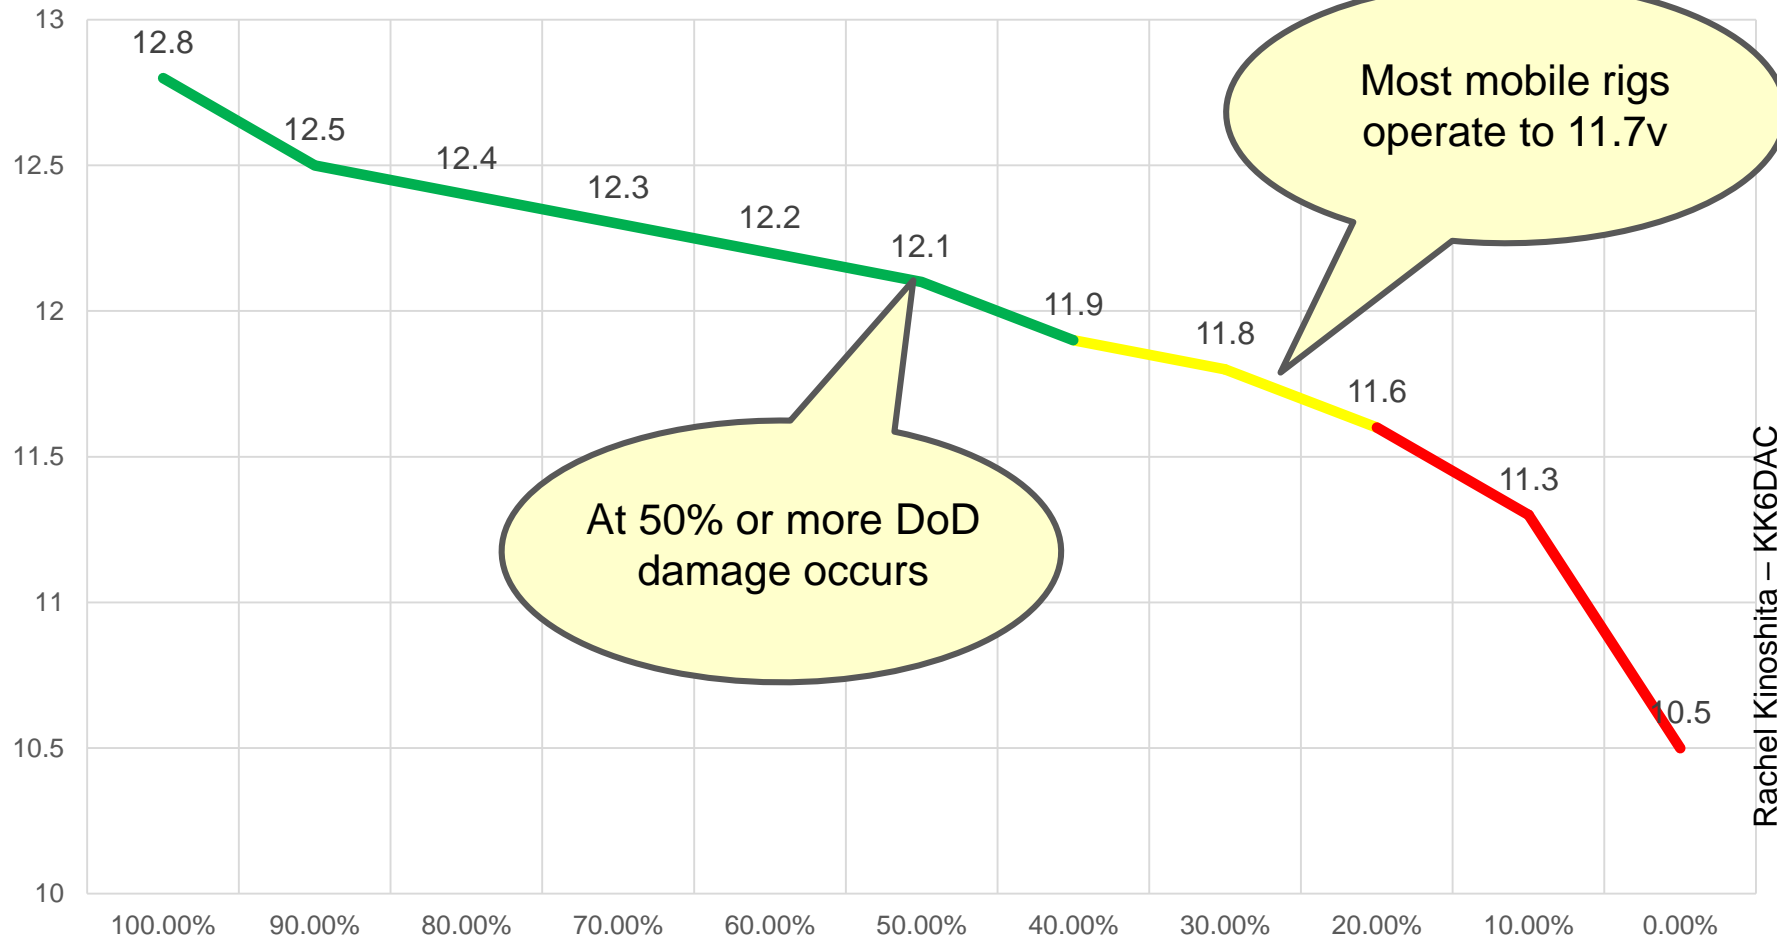

Lithium Iron Phosphate (LiFePO₄)

- **Pros**

- Very low self-discharge
- Relatively flat discharge curve
- Can be recharged thousands of times
- At 3.2vdc per cell, 4 cells in series (4s) has a nominal voltage of 12.8v and max voltage of 14.2v
- Will not leak
- No outgassing
- High energy density
- Unlike Li-Ion, LiFePO₄ is very safe
- Can be field charged using a lead acid battery charger
- Peukert constant = 1.01 or less


- **Cons**

- Expensive
- Must balance the cells using a proper LiFePO₄ charger



Lithium Iron Phosphate (LiFePO₄)

LiFePO₄ Voltage Curve

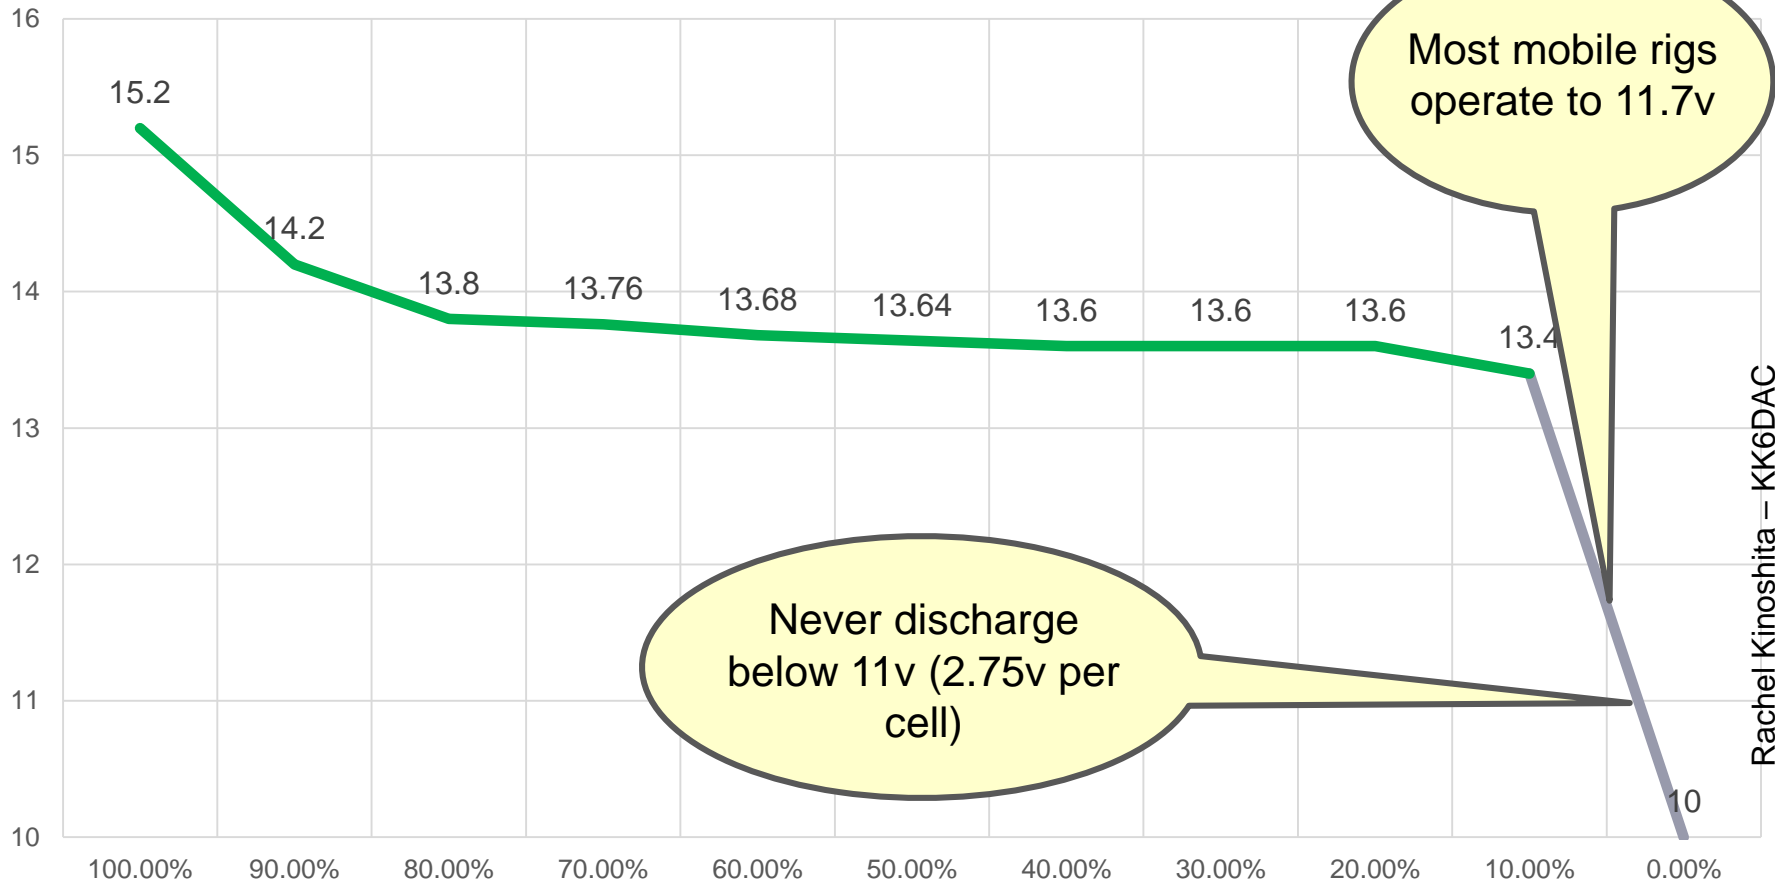

Test methodology

- **Used the Multi-Discharge test using the following settings**
 - Low-Voltage cut-off: 11.2v
 - 1s steps until cut-off voltage is met
 - Three step discharge (simulate 50w transmit)
 - 15s @ 10.3a (transmit)
 - 30s @ 1a (receive)
 - 15s @ 0.1a (idle)
 - Three step discharge (simulate 25w transmit)
 - 15s @ 6.5a (transmit)
 - 30s @ 1a (receive)
 - 15s @ 0.1a (idle)
- **Batteries were fully charged before testing**
- **Sealed Lead Acid battery used was an ExpertPower EXP 12200 12v, 20 Ah purchased on Amazon for \$38.00; 12.5 lbs**
- **LiFePO4 battery used was a Bioenno BLF-1220W/A 12v, 20 Ah purchased at Ham Radio Outlet \$192.95; 5.5 lbs**

Test Results

12v SLA - High Power.bt2

12v SLA - High Power: 6 Lead Acid cells Multiple Discharge Profile

Sealed Lead Acid 12v 20 AH
battery (50w simulation)




13.2v to start

Drops to
12.3v on PTT

11.2v cut-off

4:49:11
15 Ah

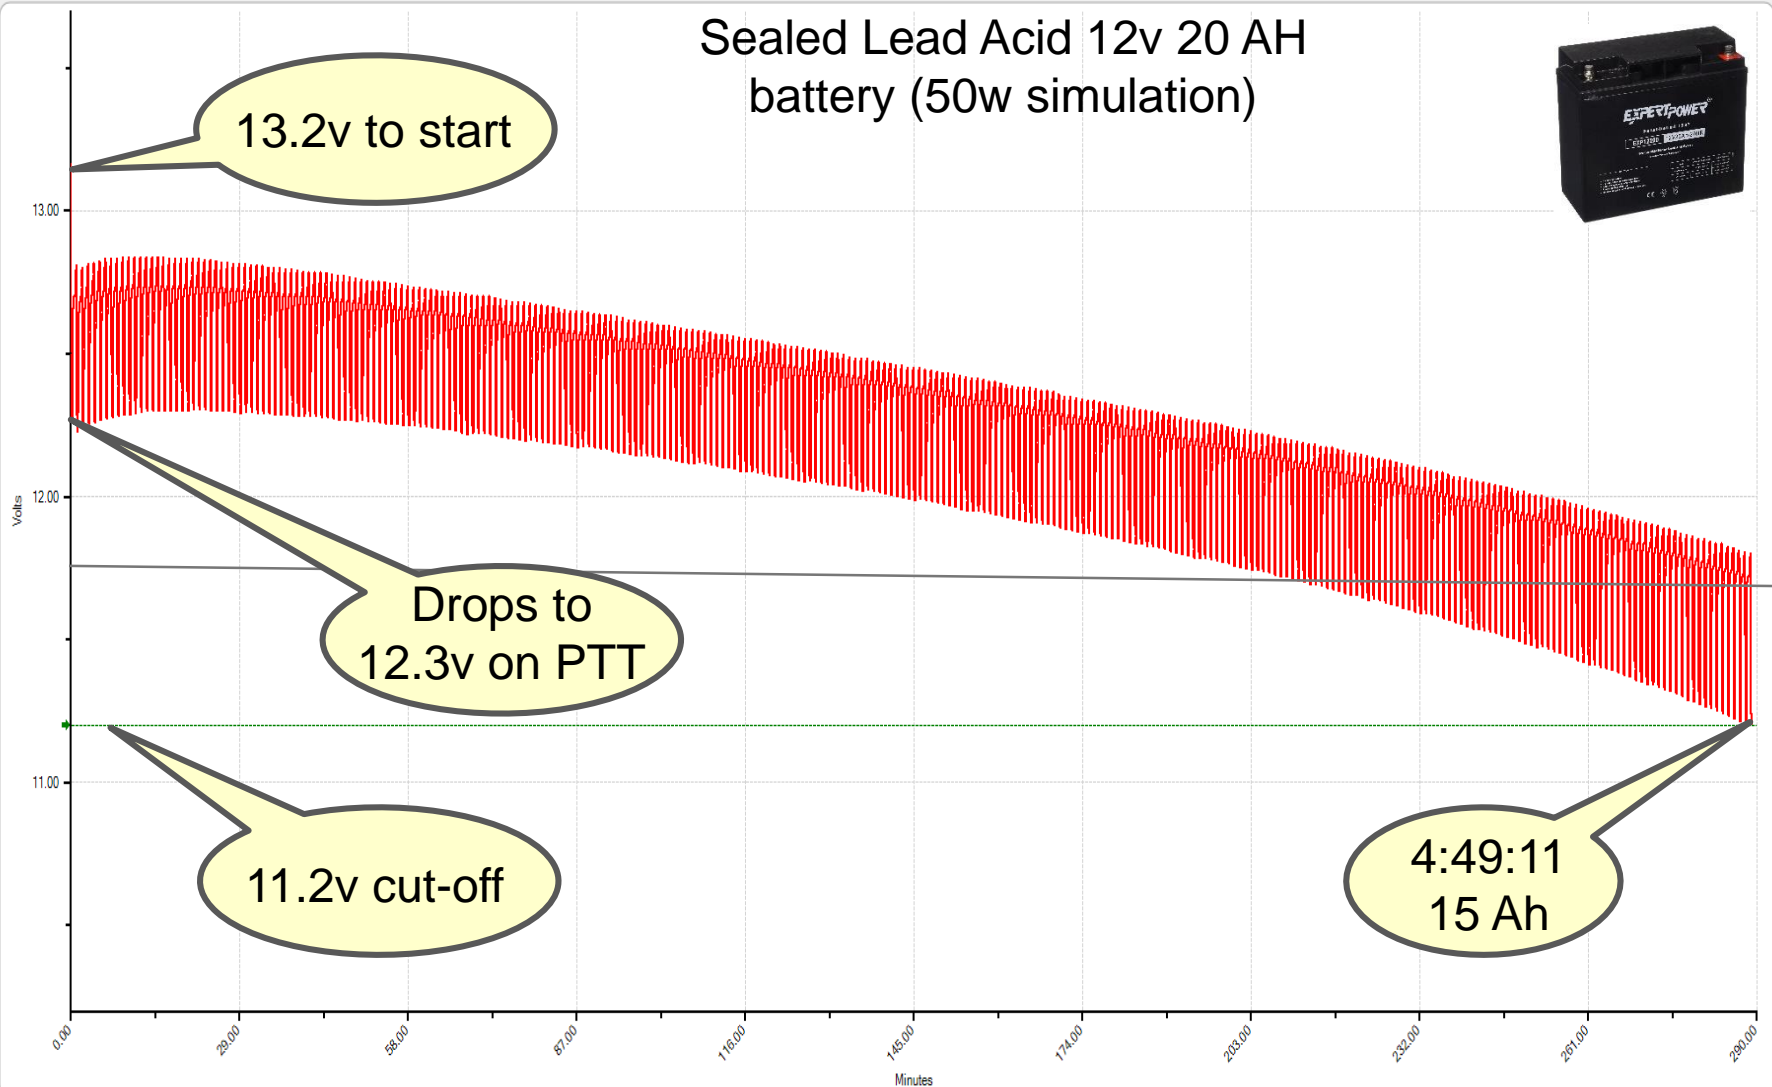

Voltage

12.09

Current

-

AmpHr

15.024

Watts

-

Status

Done

Resistance

0.19

Rachel Kinoshita - KK6DAC

59

Test Results

12v SLA - High Power.bt2

12v SLA - High Power: 6 Lead Acid cells Multiple Discharge Profile

Sealed Lead Acid 12v 20 AH
battery (50w simulation)



13.2v to start

Drops to
12.3v on PTT

11.2v cut-off

3:32:11
@ 11.7v

4:49:11
15 Ah

Voltage

12.09

Current

-

AmpHr

15.024

Watts

-

Status

Done

Resistance

0.19

Rachel Kinoshita - KK6DAC

60

Test Results

12v SLA - Med Power.bt2

12v SLA - Med Power: 6 Lead Acid cells Multiple Discharge Profile

Sealed Lead Acid 12v 20 AH
battery (25w simulation)



13.3v to start

Drops to
12.75v on PTT

11.2v cut-off

7:45:11
16.7 Ah

Voltage

13.30

Current

-

AmpHr

16.731

Watts

-

Status

Done

Resistance

0.33

Rachel Kinoshita - KK6DAC

61

Test Results

12v SLA - Med Power.bt2

12v SLA - Med Power: 6 Lead Acid cells Multiple Discharge Profile

Sealed Lead Acid 12v 20 AH
battery (25w simulation)



13.3v to start

Drops to
12.75v on PTT

11.2v cut-off

6:17:12
@ 11.7v

7:45:11
16.7 Ah

Voltage

13.00

Current

-

AmpHr

16.731

Watts

-

Status

Done

Resistance

0.33

Rachel Kinoshita - KK6DAC

62

Test Results

12v LiFePO4 - High Power.bt2

— 12v LiFePO4 - High Power: 4 LiFePO4 cells Multiple Discharge Profile

LiFePO4 12v 20 AH battery
(50w simulation)




14.5v to start

Drops to
13.5v on PTT

11.2v cut-off

6:14:14
19.5 Ah

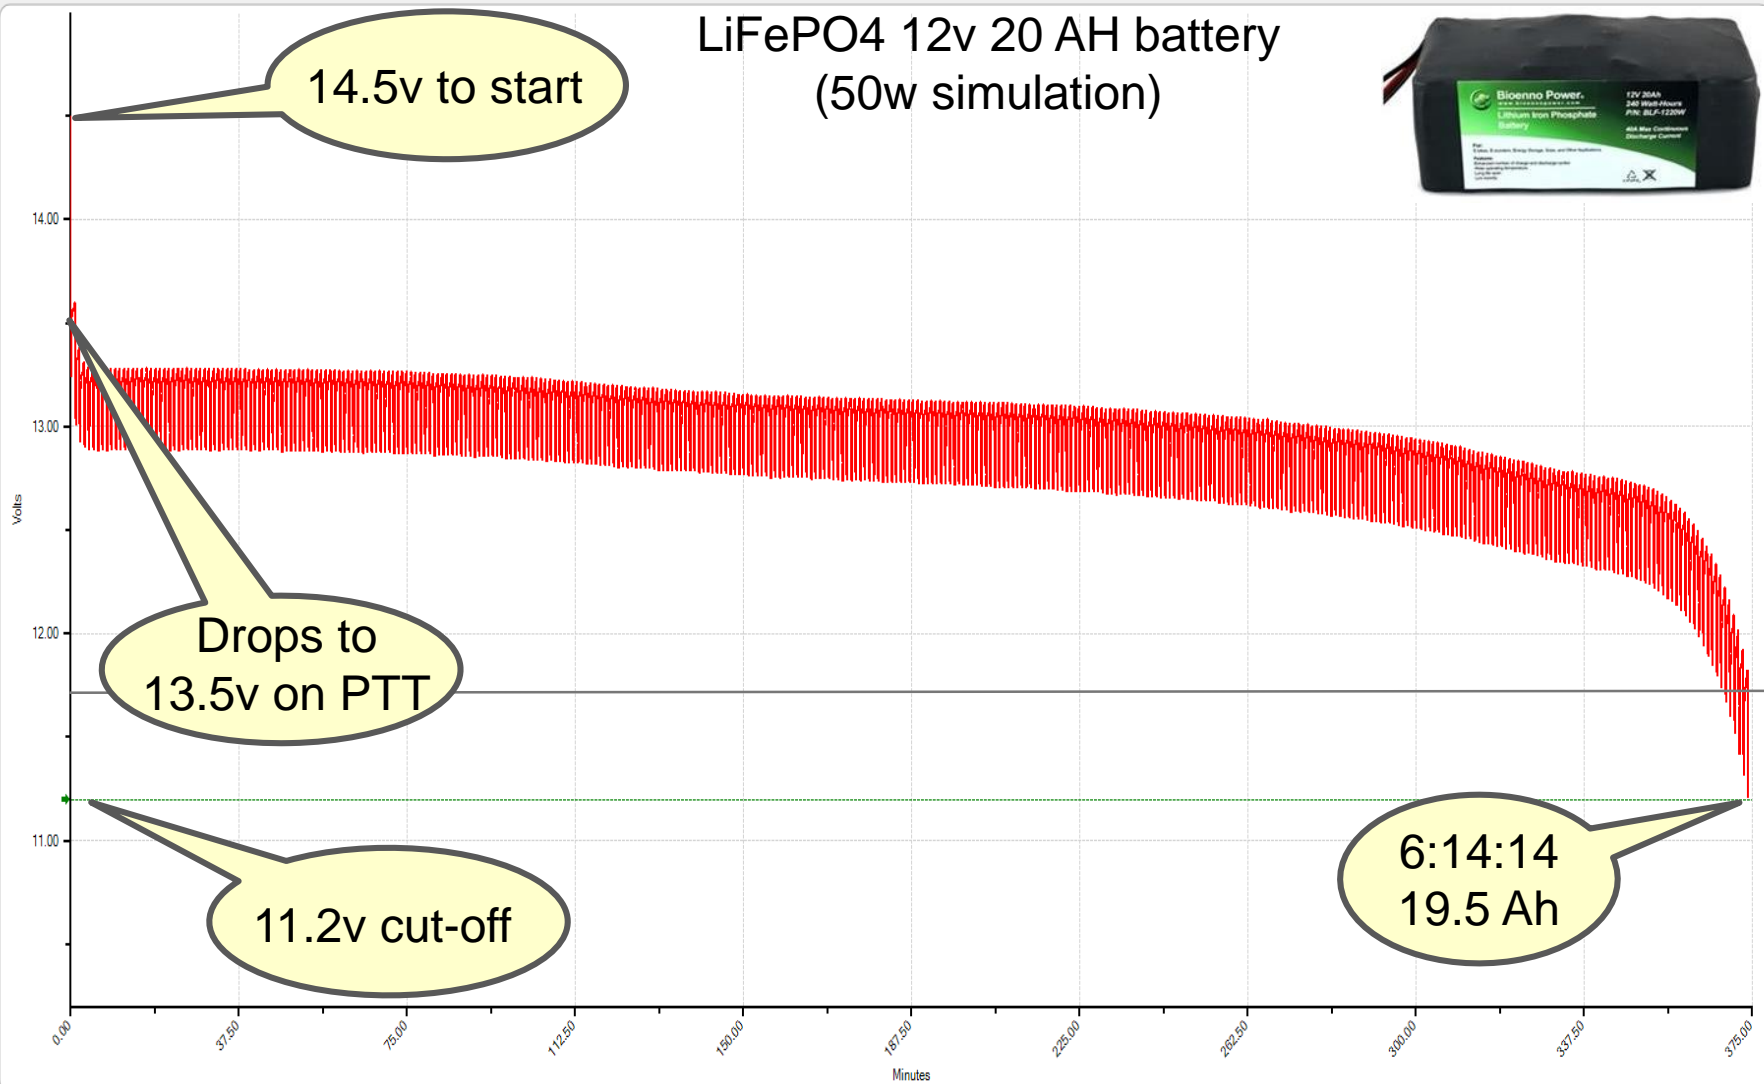

Voltage

12.18

Current

-

AmpHr

19.487

Watts

-

Status

Done

Resistance

0.32

Rachel Kinoshita - KK6DAC

63

Test Results

12v LiFePO4 - High Power.bt2

— 12v LiFePO4 - High Power: 4 LiFePO4 cells Multiple Discharge Profile

LiFePO4 12v 20 AH battery
(50w simulation)




14.5v to start

Drops to
13.5v on PTT

11.2v cut-off

6:08
@ 11.7v

6:14:14
19.5 Ah

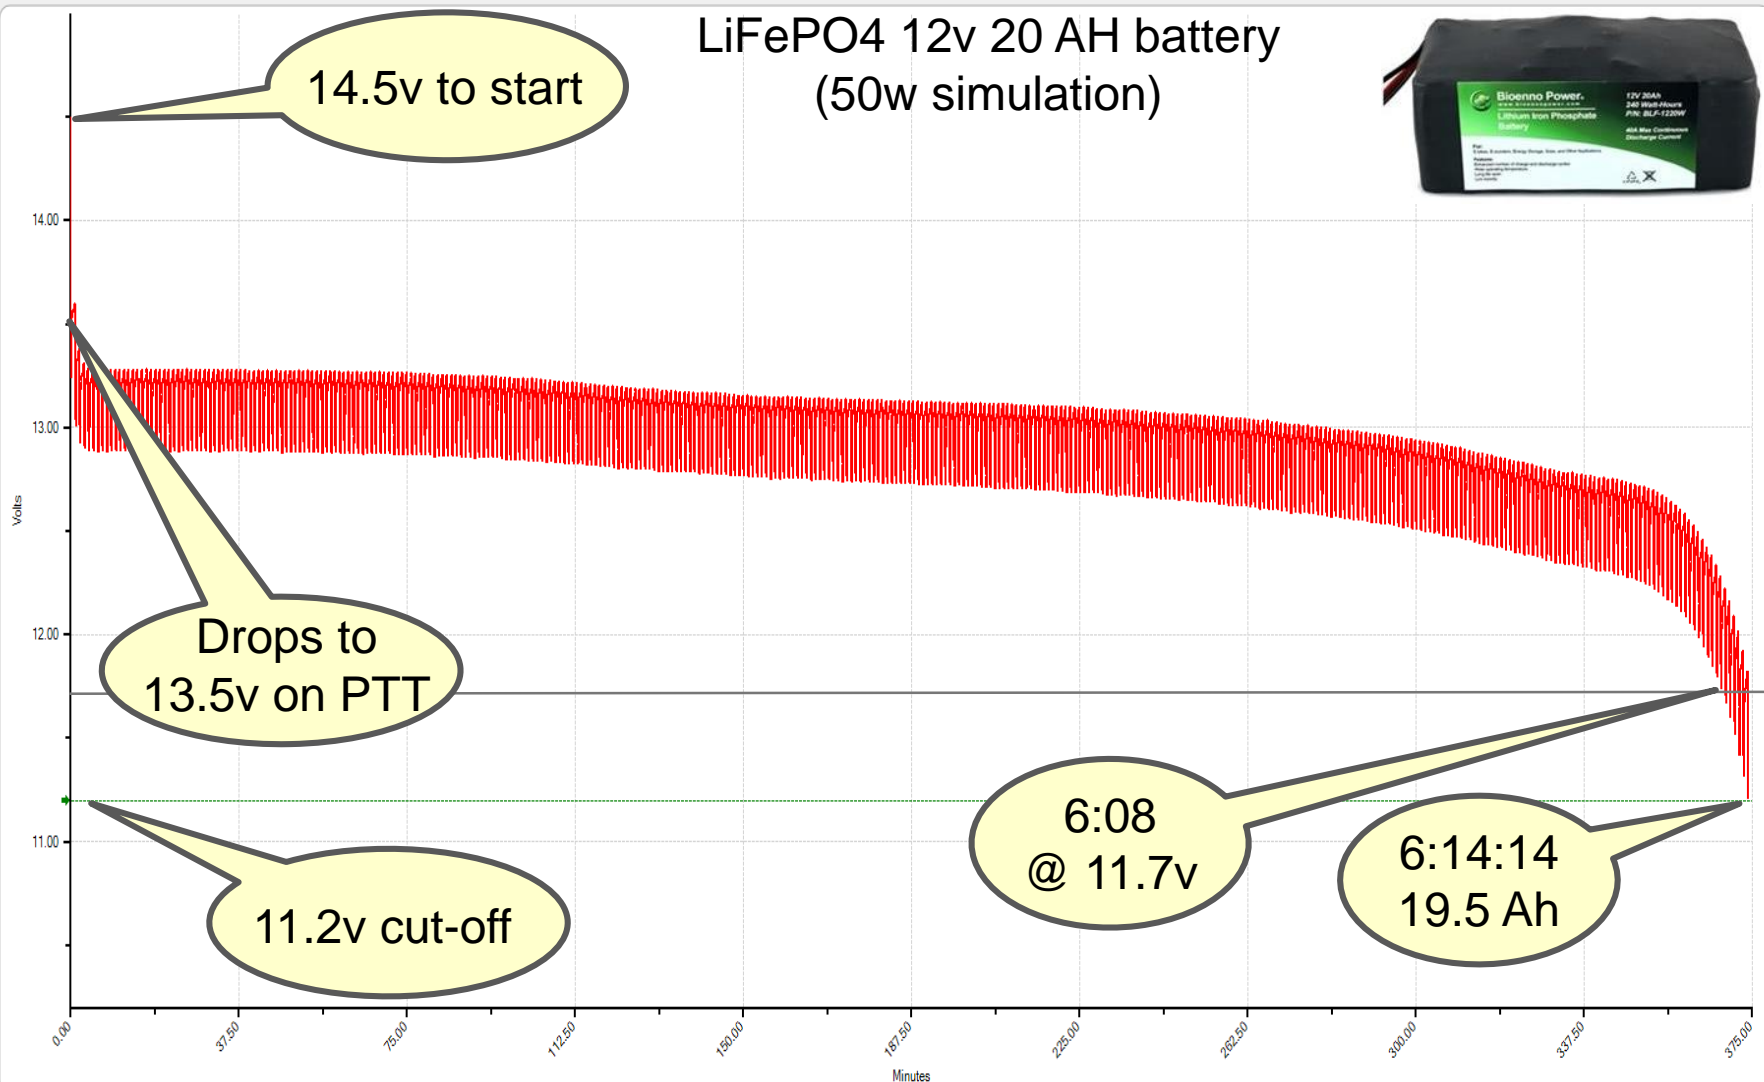

Voltage

12.18

Current

-

AmpHr

19.487

Watts

-

Status

Done

Resistance

0.32

Rachel Kinoshita - KK6DAC

64

Test Results

12v LiFePO4 - Med Power02.bt2

— 12v LiFePO4 - Med Power: 4 LiFePO4 cells Multiple Discharge Profile

LiFePO4 12v 20 AH battery
(25w simulation)



14.4v to start

Drops to
13.4v on PTT

11.2v cut-off

9:00:11
19.5 Ah

Voltage

12.12

Current

-

AmpHr

19.421

Watts

-

Status

Done

Resistance

0.50

Rachel Kinoshita - KK6DAC

65

Test Results

12v LiFePO4 - Med Power02.bt2

12v LiFePO4 - Med Power: 4 LiFePO4 cells Multiple Discharge Profile

LiFePO4 12v 20 AH battery
(25w simulation)



14.4v to start

Drops to
13.4v on PTT

11.2v cut-off

8:55
@ 11.7v

9:00:11
19.5 Ah

Voltage

12.12

Current

-

AmpHr

19.421

Watts

-

Status

Done

Resistance

0.50

Rachel Kinoshita - KK6DAC

66

Test Results

\$53.00 / 17.5 lbs



3:32	4:49	6:17	7:45	Pb
6:08	6:14	8:55	9:00	LiFePo4
1.74	1.29	1.42	1.16	1.40

=



\$192.95 / 5.5 lbs

Test Results

\$213.00 / 70.1 lbs



=



Can be fully recharged up to 500 times

Can be fully recharged up to 2000 times

\$192.95 / 5.5 lbs

Using Batteries in Emergency Communications

- **Post Katrina, FEMA was left with more trailers than they knew what to do with**



Using Batteries in Emergency Communications

- The problem was exacerbated because many of the trailers had toxic levels of formaldehyde



Using Batteries in Emergency Communications

- In late 2014 / early 2015 the Menlo Fire District acquired a surplus FEMA Katrina trailer



Using Batteries in Emergency Communications

- **Menlo Fire purchased the CERT trailer to provide a platform for communications during an emergency or disaster**
- **The trailer was outfitted with amateur radios, computers, monitors, a generator, antennas and other accessories necessary to operate**
- **In that configuration it required manual charging of the battery on a regular basis to prevent battery damage due to low voltage**
- **Generators require fuel, regular oil changes and have moving parts which can fail**
- **In a disaster, gasoline for the generator may become a scare resource**
- **Configuring the trailer to run stand-alone with only batteries and PV panels would ensure independent operations during a disaster**

Menlo Park CERT Communications Trailer



Menlo Park CERT Communications Trailer




Menlo Park CERT Communications Trailer



Menlo Park CERT Communications Trailer



Menlo Park CERT Communications Trailer

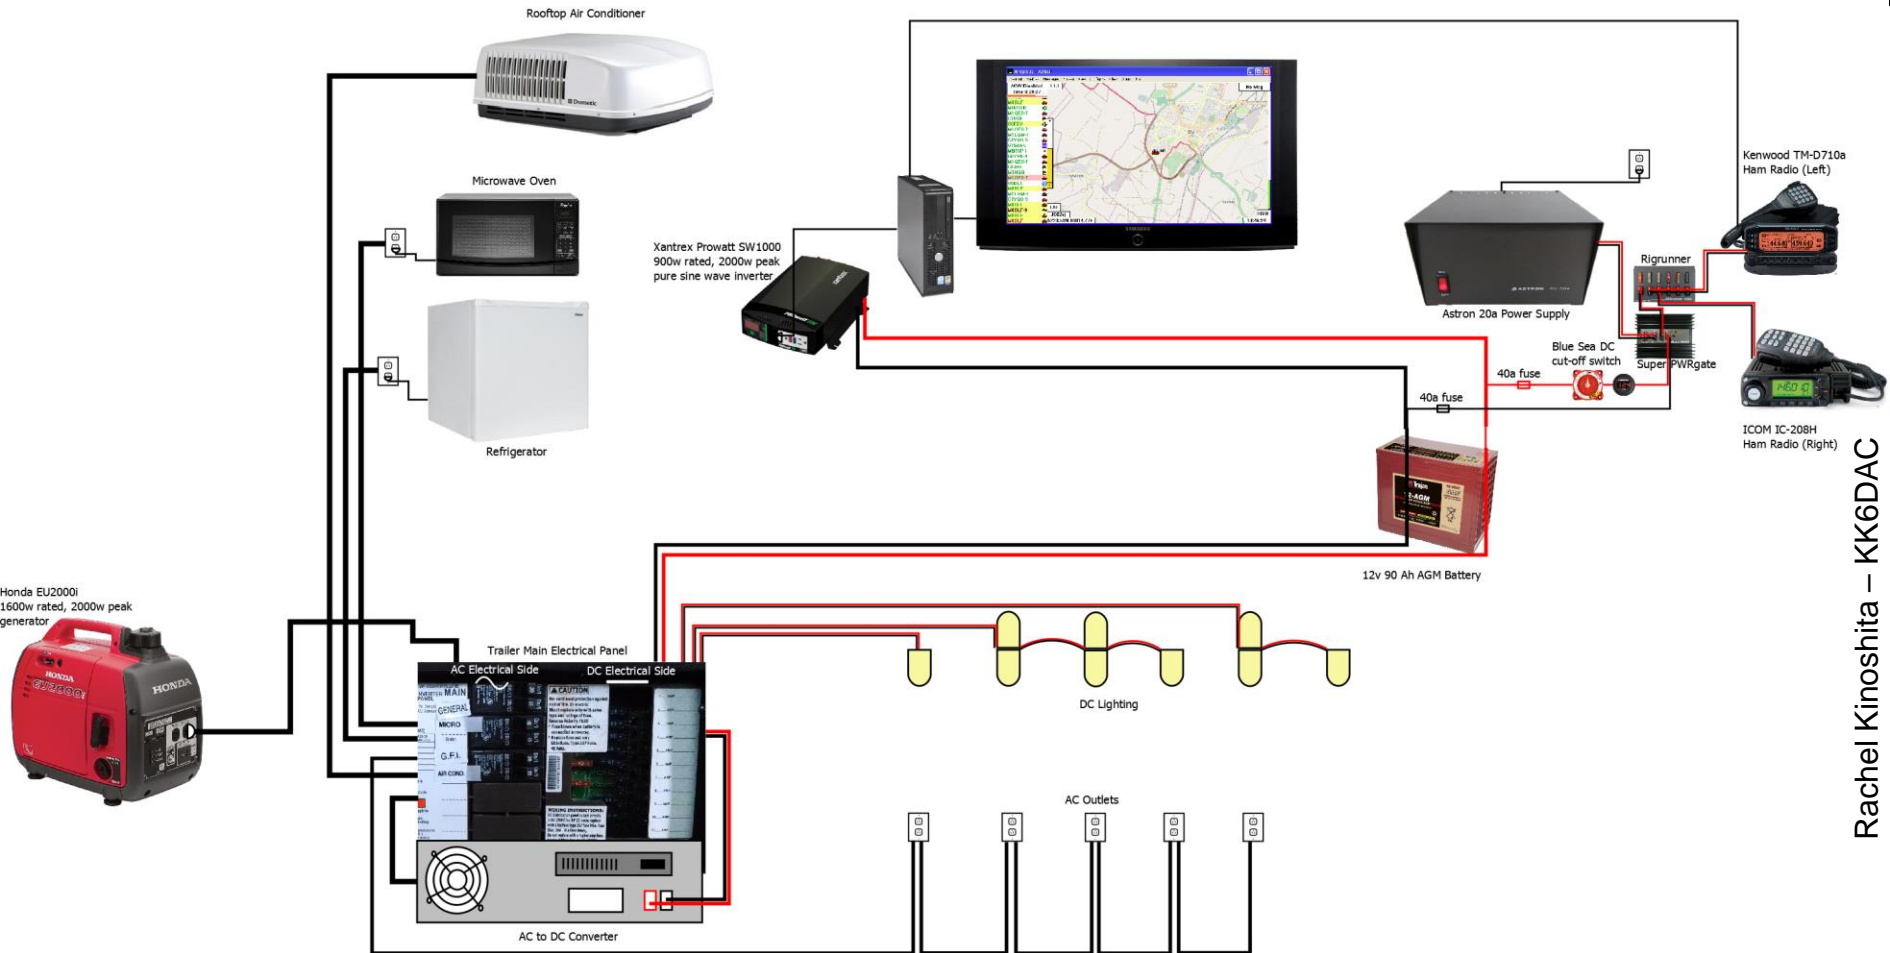

Menlo Park - Proposed System

- **Batteries will automatically be maintained**
- **Trailer will always be ready to be deployed**
- **Provides sufficient power to run radios, computers and lights for an extended period of time**
- **Reduces or removes dependency on gasoline or propane generator**
- **Designed for growth**

Menlo Park - Proposed System

60A MPPT Solar
Charge Controller



6 slot Solar
Combiner box




4x 250w PV Panels


4x 140Ah AGM Batteries



Menlo Park – Completed System

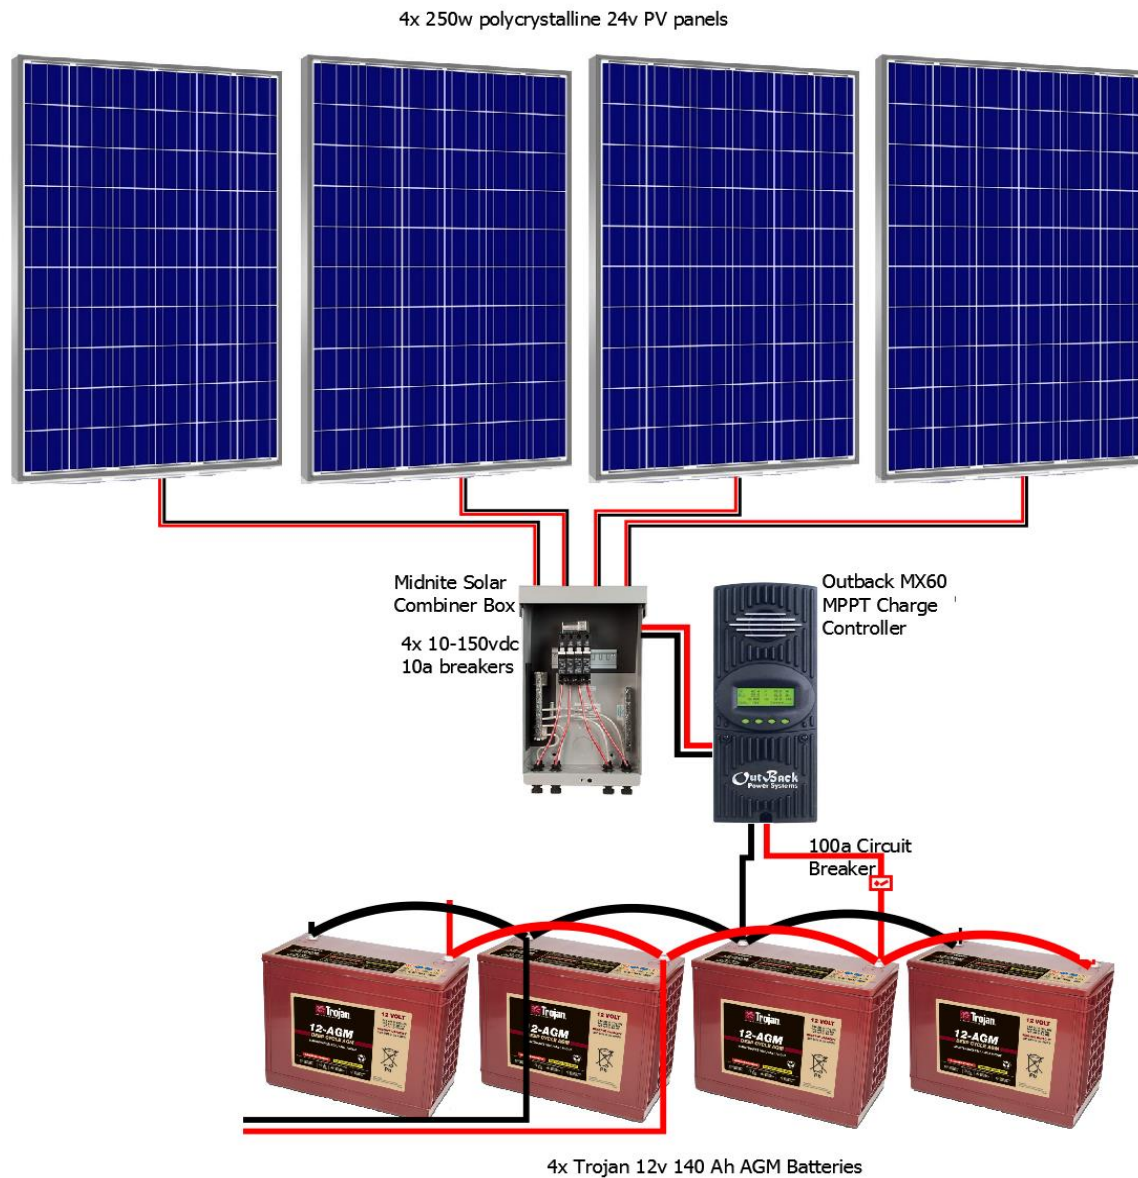


Menlo Park CERT Communications Trailer

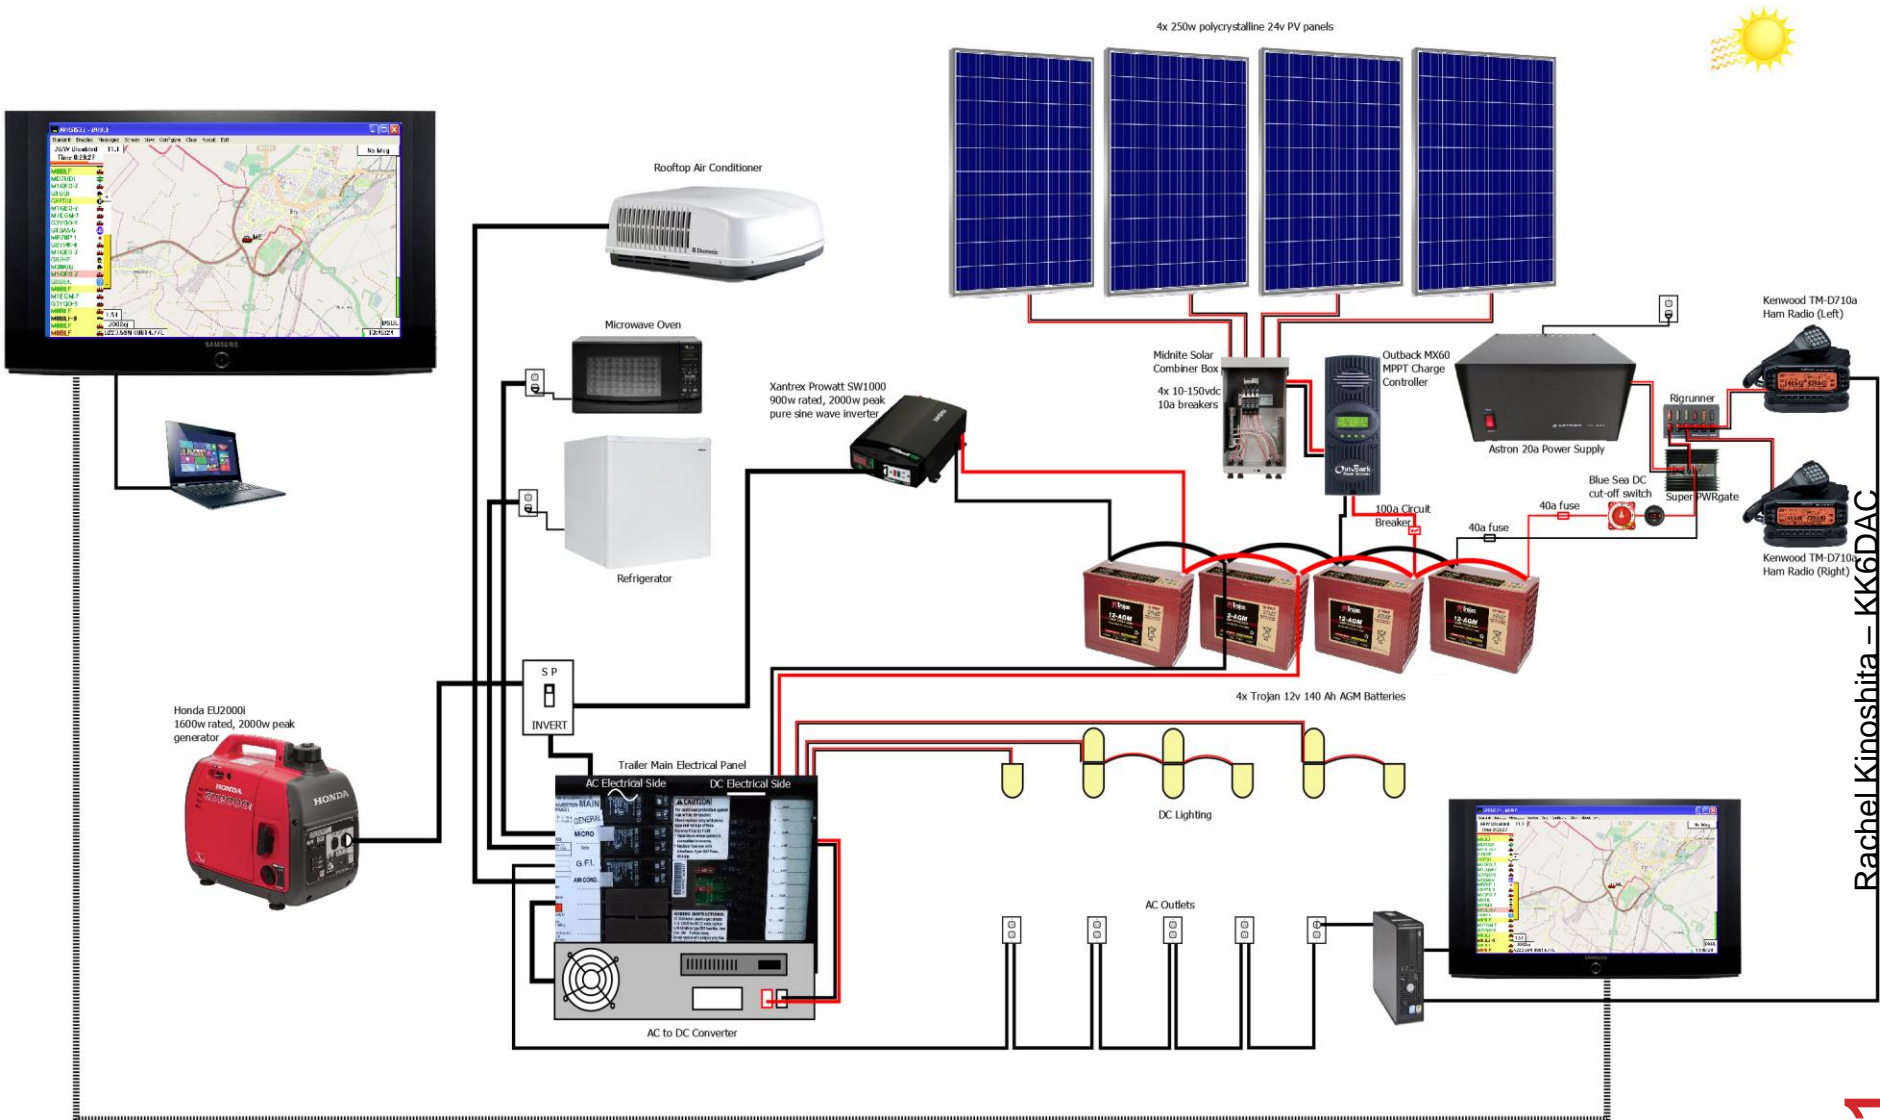


Menlo Park CERT Communications Trailer

Automatic Packet Reporting
System (APRS) Telemetry

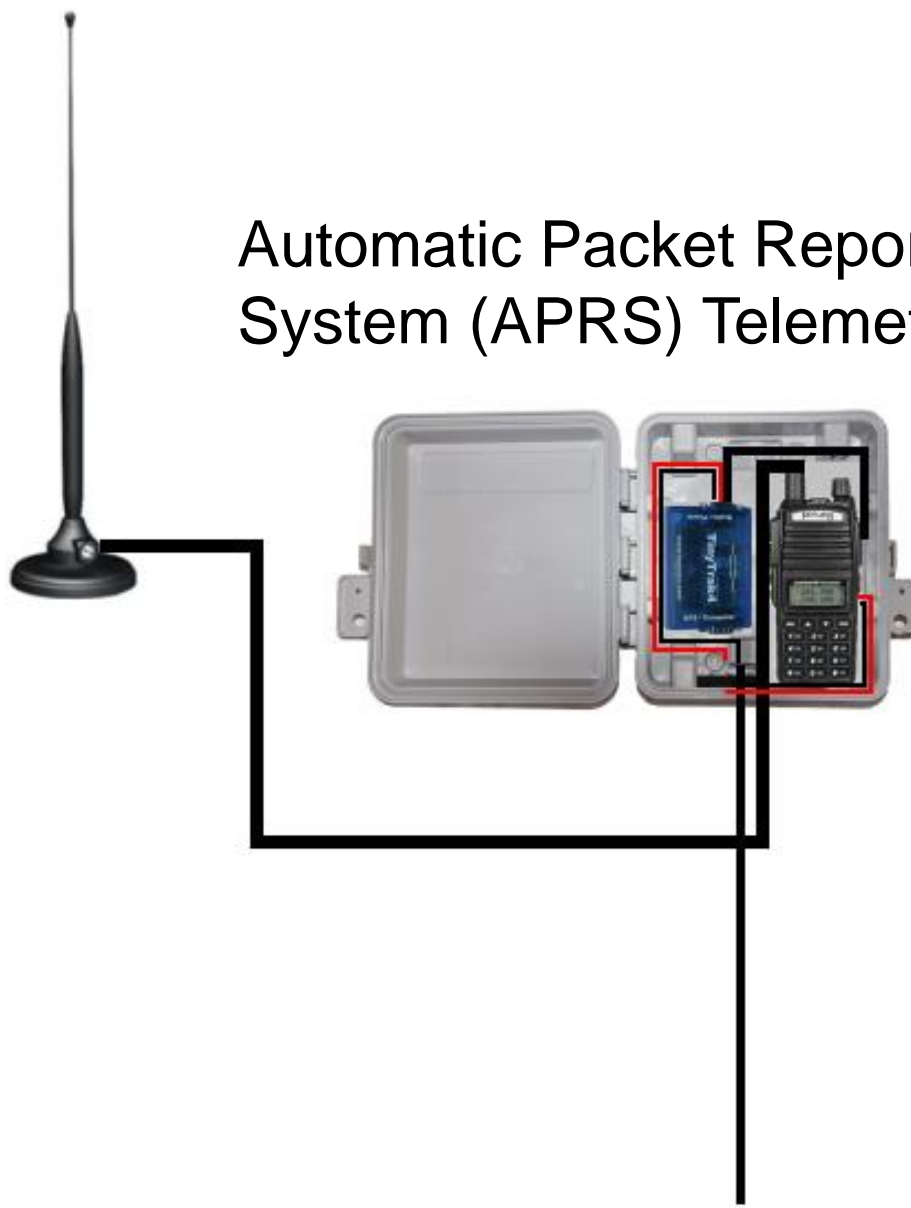

Menlo Park CERT Communications Trailer

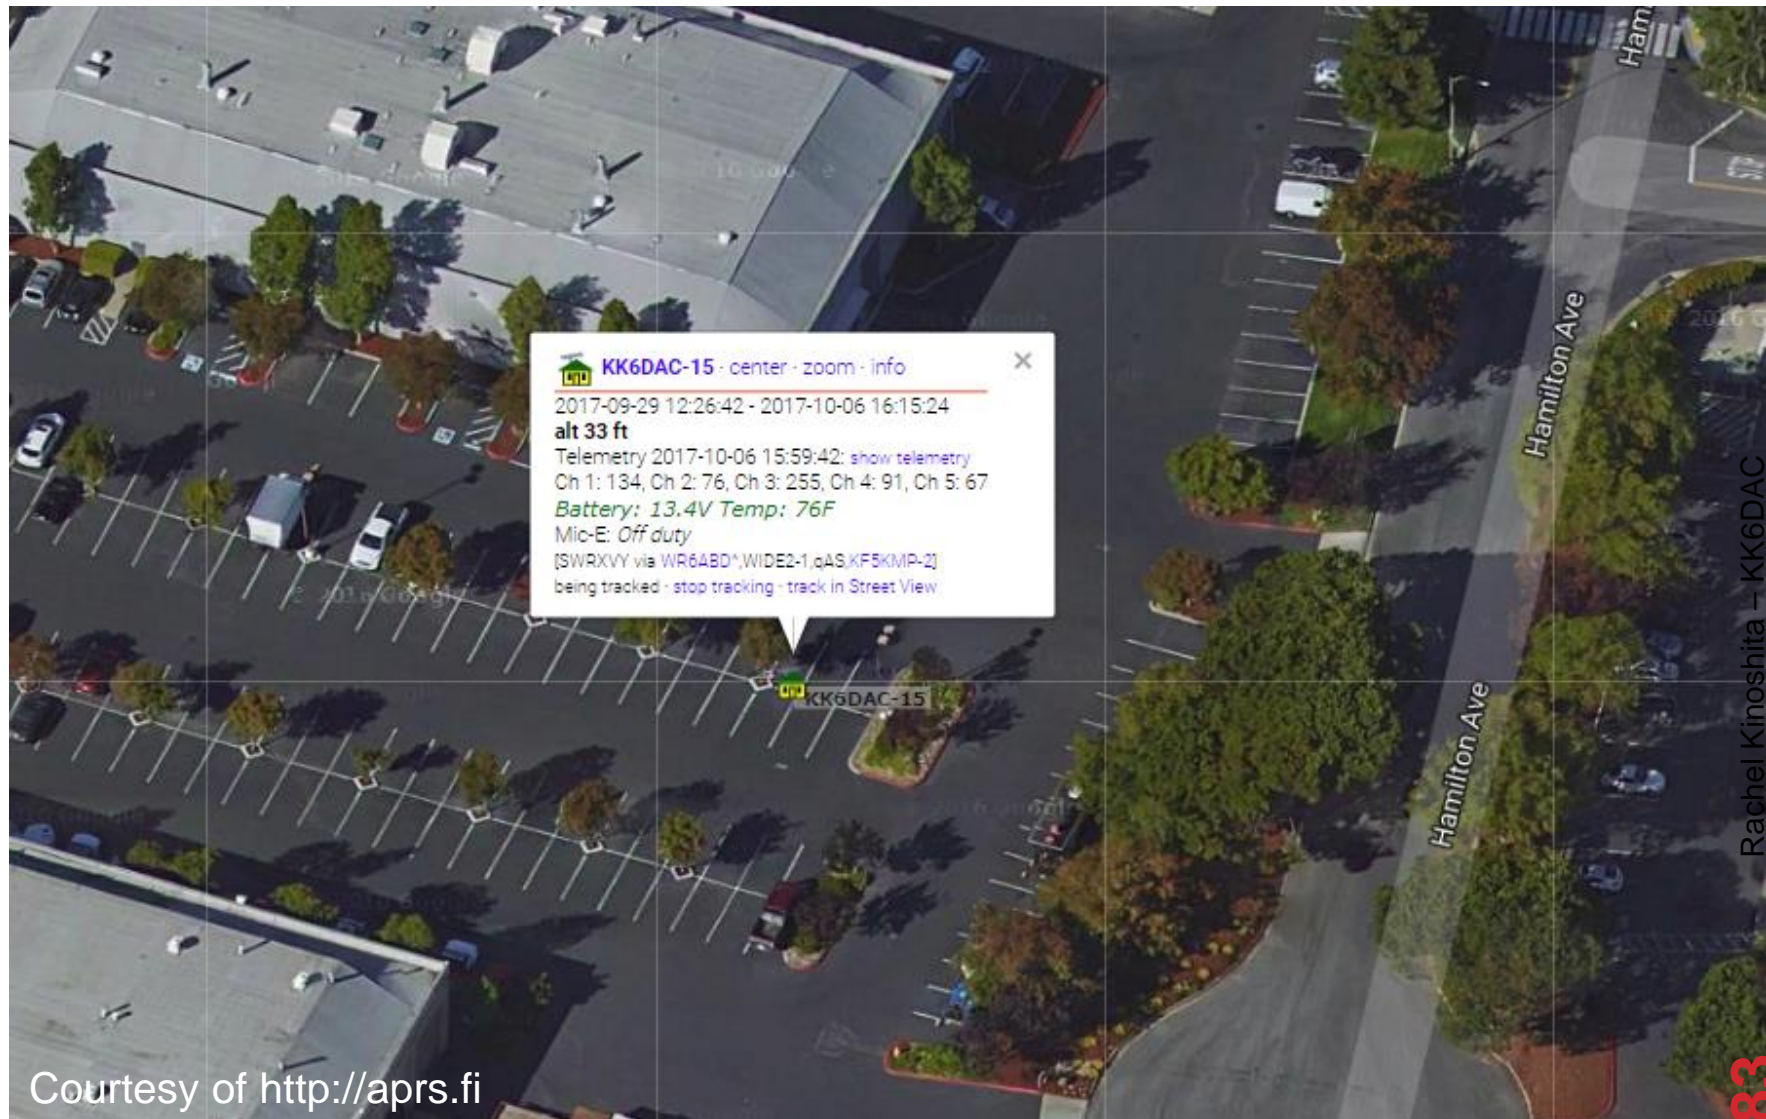


Menlo Park CERT Communications Trailer

Callsign: Completed generating statistics (took 0.015 s).
Real-time page updates enabled.

Start date (YYYY-MM-DD HH:MM):
End date (YYYY-MM-DD HH:MM):

It is possible to search using wildcards (*?) after a prefix. Example: VK*

Telemetry from **KK6DAC-15**  - [info](#)

Comment: Battery: 13.4V Temp: 77F

Mic-E message: Off duty

Location: 37°28.69' N 122°08.98' W - locator [CM87WL24AS](#) - [show map](#) - [static map](#)
0.8 miles Northwest bearing 324° from [East Palo Alto, San Mateo County, California, United States](#) [?]
2.4 miles Northeast bearing 47° from [Menlo Park, San Mateo County, California, United States](#)
16.9 miles Northwest bearing 305° from [San Jose, Santa Clara County, California, United States](#)
25.2 miles Southeast bearing 144° from [San Francisco, San Francisco County, California, United States](#)

Last position: 2017-10-06 16:25:25 PDT (1m50s ago)
2017-10-06 16:25:25 PDT local time at East Palo Alto, United States [?]

Last telemetry: 2017-10-06 15:59:42 PDT (27m ago)
2017-10-06 15:59:42 PDT local time at East Palo Alto, United States [?]

Altitude: 33 ft

Values: Channel 1: 134 (TLM: 134 EQN: 0,1,0)
Channel 2: 76 (TLM: 76 EQN: 0,1,0)
Channel 3: 255 (TLM: 255 EQN: 0,1,0)
Channel 4: 91 (TLM: 91 EQN: 0,1,0)
Channel 5: 67 (TLM: 67 EQN: 0,1,0)

Bit sense: ☒ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5 ☐ 6 ☐ 7 ☐ 8 (TLM: BITS: 11111111)

Telemetry history graphs for **KK6DAC-15**


[[24 hours](#) · [48 hours](#) · [week](#) · [month](#) · [year](#)]

KK6DAC-15 Channel 1 2017-10-04 16:28:02 -> 2017-10-06 15:59:42 PDT




Menlo Park – 48 Hours of Collected Data

KK6DAC-15 Channel 1 2017-10-01 16:12:57 -> 2017-10-03 16:02:29 PDT

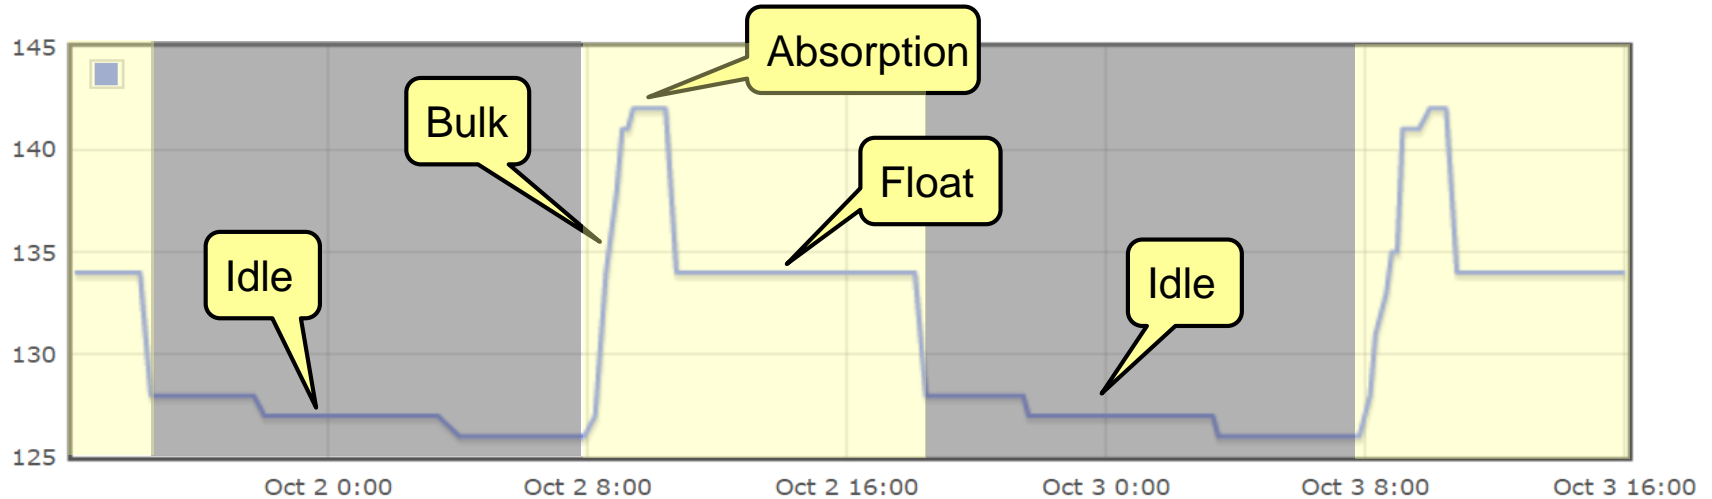


KK6DAC-15 Channel 2 2017-10-01 16:12:57 -> 2017-10-03 16:02:29 PDT

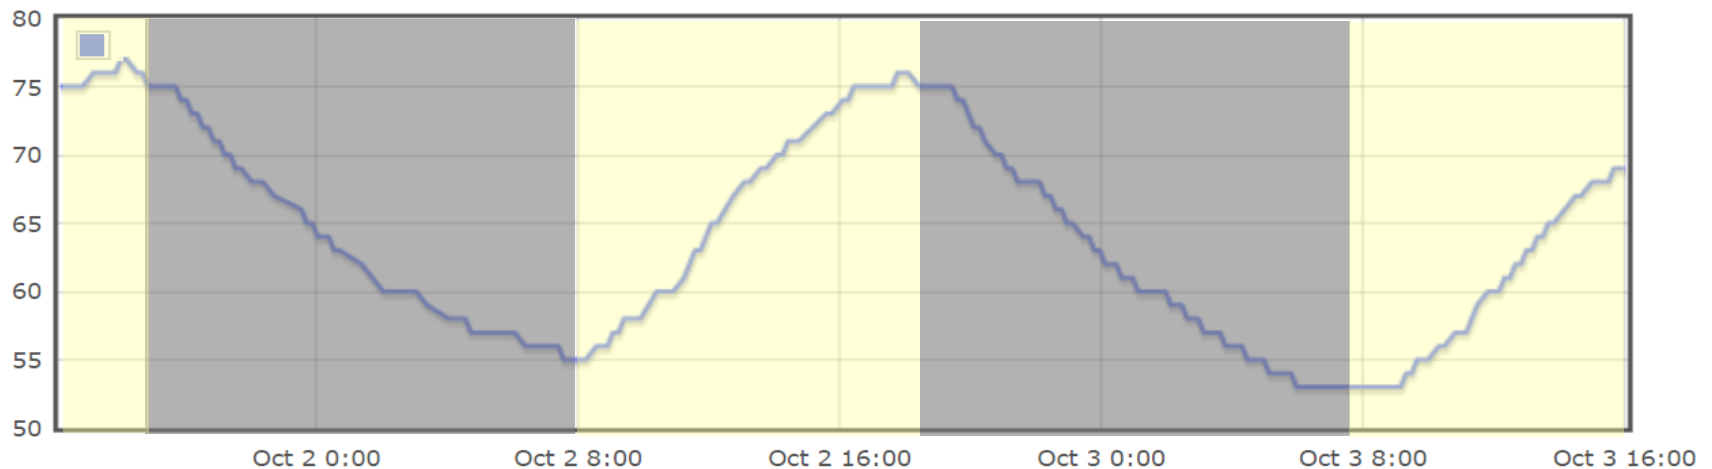


Menlo Park – 1 Month of Collected Data

KK6DAC-15 Channel 1 2017-09-03 16:00:00 -> 2017-10-03 16:00:00 PDT

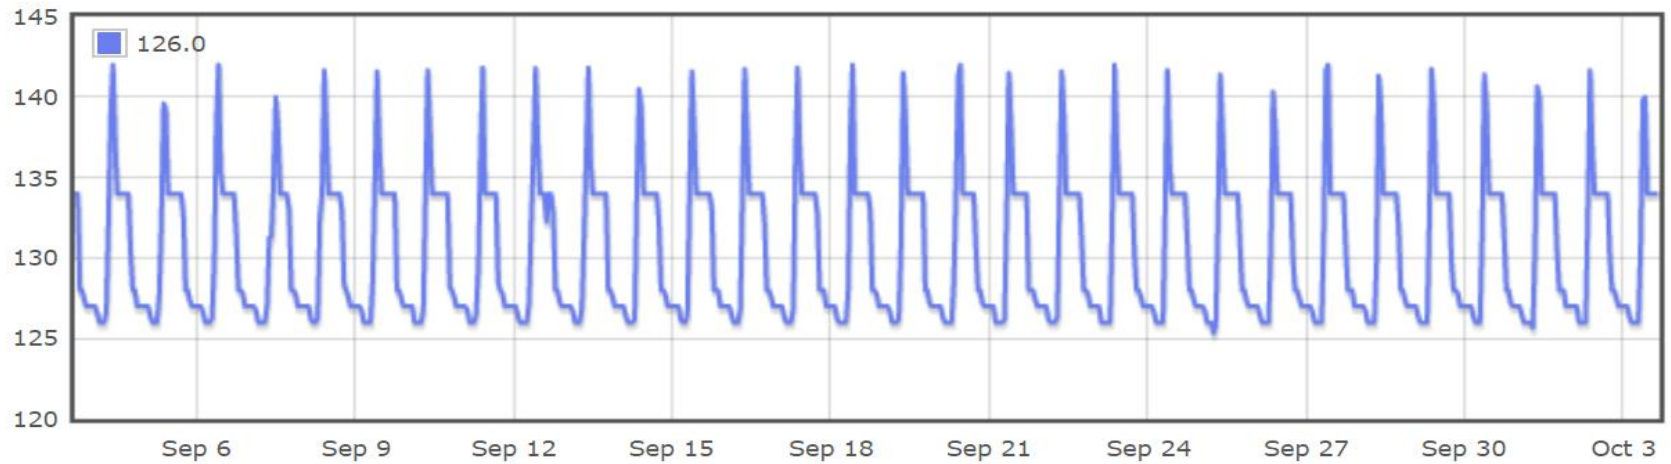


KK6DAC-15 Channel 2 2017-09-03 16:00:00 -> 2017-10-03 16:00:00 PDT

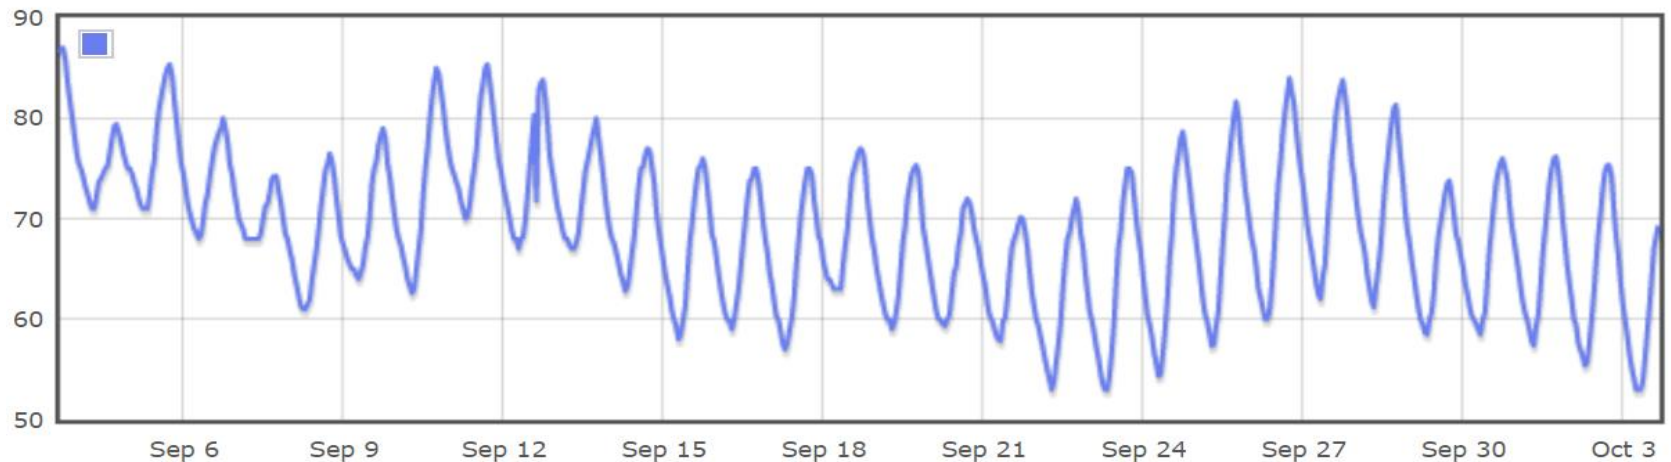


Menlo Park – How Are We Doing this Winter?

KK6DAC-15 Channel 1 2018-01-04 14:11:44 -> 2018-01-11 14:02:47 PST

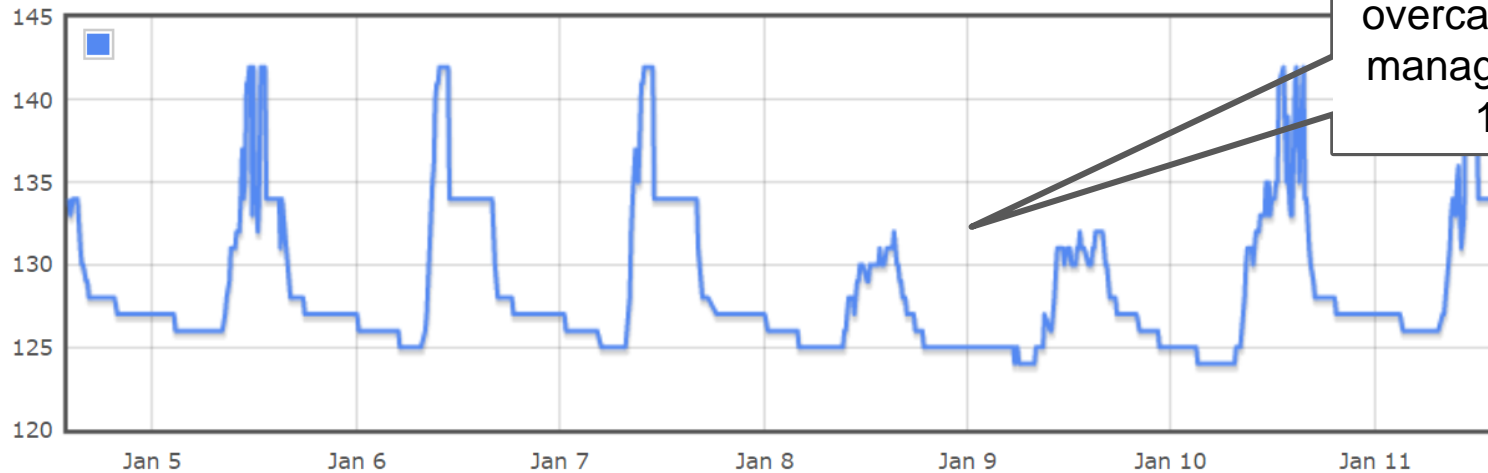

KK6DAC-15 Channel 2 2018-01-04 14:11:44 -> 2018-01-11 14:02:47 PST

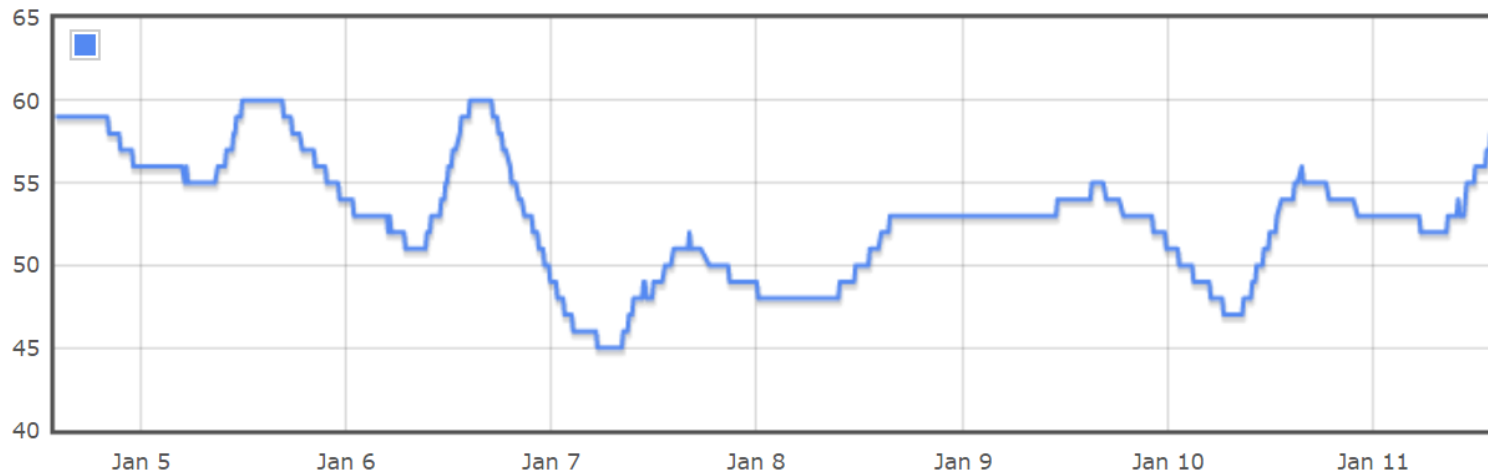

Menlo Park CERT – What Did it Cost?

Qty	Desc	Price	Total
4	Trojan 12v 140ah AGM Battery	\$420.00	\$1,680.00
4	Amerisolar 250w 24v PV panel	\$170.00	\$680.00
2	Solarline 50' cables with MC4 connectors	\$44.00	\$88.00
4	Aluminum Z bracket kit	\$9.00	\$36.00
1	Outback FX60 12-48v MPPT Charge Controller	\$602.00	\$602.00
1	Midnite Solar MNPV6 Combiner Box	\$95.00	\$95.00
4	Midnite 150VDC MNEPV DIN Mount Breaker	\$16.00	\$64.00
1	Misc wire and connectors	\$200.00	\$200.00
1	Lab bolts and sealant	\$40.00	\$40.00
1	Shipping	\$400.00	\$400.00
	Total		\$3,885.00

Conclusion

- **Portable Operations**

- Lead acid batteries are relatively inexpensive, but the trade-off is weight, capacity, self-discharge and overall life; Only sealed lead acid batteries should be used to prevent spillage
- LiFePO₄ batteries are less than half the weight of an equivalent SLA battery, has more useable capacity, can sit for long periods of time without losing much charge and has 4 times the life. The trade-off is price, but in the long-term they pay for themselves

- **Home / Base Operations**

- Weight is less of an issue so lead acid batteries have fewer disadvantages. Never use flooded batteries inside the house due to out-gassing. Need to keep them on a float charge when not in use
- LiFePO₄ batteries will have a much longer life and will be easier to move around, but are expensive, especially for occasional use

Questions



KK6DAC@arrl.net